




FDV SPEC SHEET

Cuna C

Art. no: 102965-120-1-ddd



Lighting Solutions

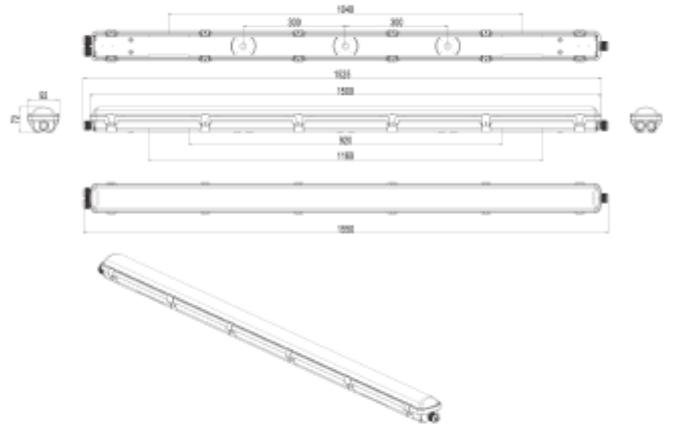

Cuna C



Art. no: 102965-120-1-ddd

LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	10400
Lumen LED (tc=25):	11400
Beam Angle:	120
CCT (Color Temperature):	30/35/4000K
CRI / Ra:	80
Color Code:	830/835/840
MacAdam (SDCM):	3
Lens (Diffuser):	Prismatic
UGR (<=):	25



FDV SPEC SHEET

Cuna C

Art. no: 102965-120-1-ddd



Lighting Solutions

PRODUCT	
Ingress Protection:	IP66
Impact Protection:	IK08
Operating Temperature [°C]:	-30 - 40
Lifetime [h]:	L80B10: 100 000
Color:	Light Grey
Length [mm]:	1500
Height [mm]:	72
Width [mm]:	92
Weight [kg]:	2,7

ELECTRICAL DATA	
Dimming:	DALI2
Flickerfree:	Yes
Standby power Psb (W) <:	0,5
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	65
Preset Power [W]:	65
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	13
Max load pr circuit - B16:	21
Max load pr circuit - C10:	22
Max load pr circuit - C16:	35
Leakage current [mA]:	0,52
Inrush current Imax [A]:	17,81
Inrush current time [µs]:	288
Socket / Cap-Base:	N/A
Current Output [mA]:	70
Emergency light [h]:	No Emergency light
Emergency light testing:	N/A

MOUNTING / CONNECTION	
Connection:	Terminal
Through-wiring (mm2):	5x2,5
Mounting:	Suspended, Ceiling, Surface, Wall