




FDV SPEC SHEET

Cuna C

Art. no: 102965-E-120-1-ddd



Lighting Solutions

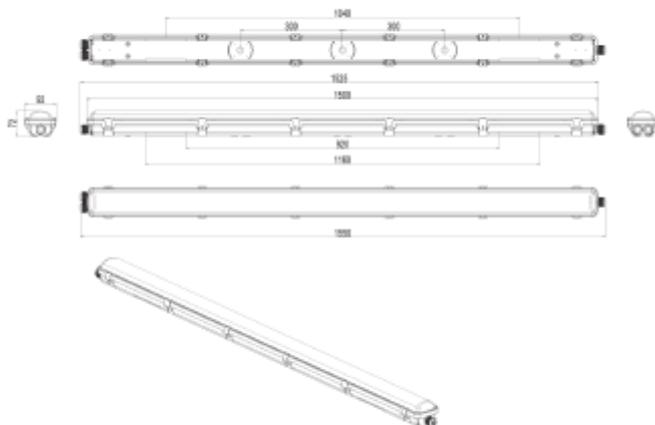

Cuna C



Art. no: 102965-E-120-1-dd

LIGHT TECHNICAL

| | |
|--------------------------|----------------|
| Lightsource Type: | LED (built in) |
| Lumen Output: | 10400 |
| Lumen LED (tc=25): | 11400 |
| Beam Angle: | 120 |
| CCT (Color Temperature): | 30/35/4000K |
| CRI / Ra: | 80 |
| Color Code: | 830/835/840 |
| MacAdam (SDCM): | 3 |
| Lens (Diffuser): | Prismatic |
| UGR (<=): | 25 |



FDV SPEC SHEET

Cuna C

Art. no: 102965-E-120-1-ddd



| PRODUCT | |
|-----------------------------|-----------------|
| Ingress Protection: | IP66 |
| Impact Protection: | IK08 |
| Operating Temperature [°C]: | -30 - 40 |
| Lifetime [h]: | L80B10: 100 000 |
| Color: | Light Grey |
| Length [mm]: | 1500 |
| Height [mm]: | 72 |
| Width [mm]: | 92 |
| Weight [kg]: | 2,92 |

| ELECTRICAL DATA | |
|-------------------------------------|-----------|
| Dimming: | DALI2 |
| Flickerfree: | Yes |
| Standby power Psb (W) <: | 0,5 |
| Flicker metric (Pst LM) <: | 1 |
| Stroboscopic effect metric (SVM) <: | 0,4 |
| System Power [W]: | 65 |
| Preset Power [W]: | 65 |
| System Voltage [V]: | 230V 50Hz |
| Protection Class: | 1 |
| Max load pr circuit - B10: | 13 |
| Max load pr circuit - B16: | 21 |
| Max load pr circuit - C10: | 22 |
| Max load pr circuit - C16: | 35 |
| Inrush current Imax [A]: | 17,81 |
| Inrush current time [µs]: | 288 |
| Socket / Cap-Base: | N/A |
| Current Output [mA]: | 70 |
| Emergency light [h]: | 3 hours |
| Emergency light testing: | Selftest |
| Emergency lumen out [lm]: | 300 |

| MOUNTING / CONNECTION | |
|-----------------------|-----------------------------------|
| Connection: | Terminal |
| Through-wiring (mm2): | 5x2,5 |
| Mounting: | Suspended, Ceiling, Surface, Wall |