




FDV SPEC SHEET

Uniplus Interior

Art. no: 103050-90-3



Lighting Solutions

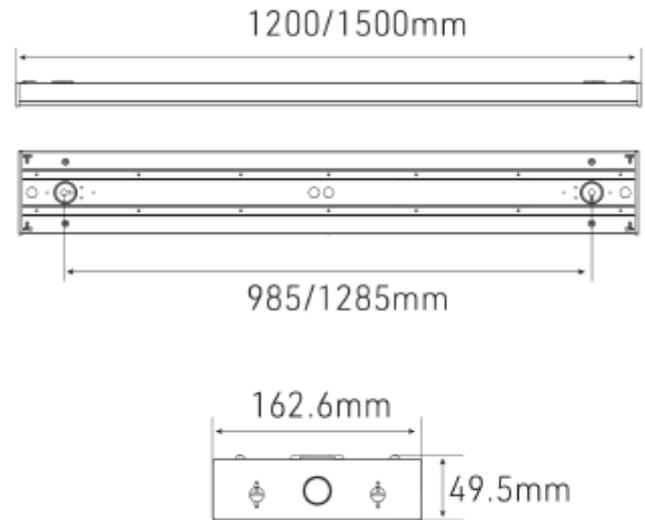

Uniplus Interior



Art. no: 103050-90-3

LIGHT TECHNICAL

Lightsource Type:	LED (replaceable)
Lumen Output:	4500
Lumen LED (tc=25):	5000
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

MOUNTING / CONNECTION

Connection:	Quickconnectx2
Through-wiring (mm2):	5x2,5
Mounting:	Suspended, Ceiling, Surface

ELECTRICAL DATA

Dimming:	None
Flickerfree:	Yes
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,4
System Power [W]:	18/22/27/31
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	33
Max load pr circuit - B16:	54
Max load pr circuit - C10:	56
Max load pr circuit - C16:	90
Leakage current [mA]:	0,7
Inrush current Imax [A]:	30
Inrush current time [µs]:	170
Socket / Cap-Base:	N/A
Current Output [mA]:	22mA



FDV SPEC SHEET

Uniplus Interior

Art. no: 103050-90-3



Lighting Solutions

PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9003
Length [mm]:	1200
Height [mm]:	49,5
Width [mm]:	162,6
Weight [kg]:	2,8
Housing Material :	Steel