



## PRODUCT SHEET


Uniplus Interior

Art. no: 103052-90-3-ddd

# NORLUX®


Lighting Solutions

## Uniplus Interior

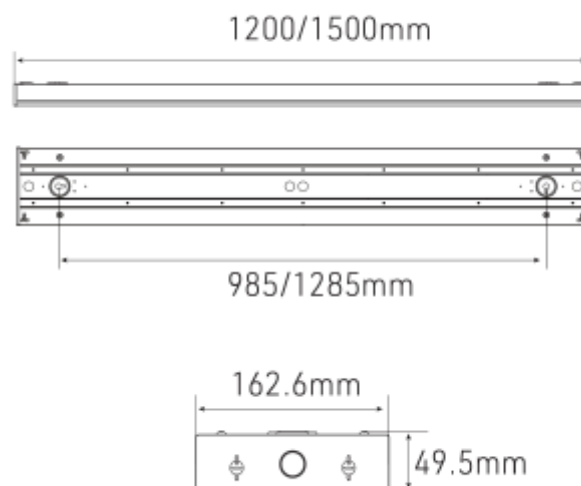

### SPECIFICATIONS

Lightsource Type:	LED (replaceable)
System Power [W]:	34WW
CCT (Color Temperature):	3000K
CRI / Ra:	80
Lumen Output:	4590lm
Lumen LED (tc=25):	5200lm
Beam Angle:	90°
Lens (Diffuser):	Micropris.
Dimming:	DALI2
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	Terminalx2
Mounting:	Suspended, Ceiling, Surface
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	135lm/W
UGR (<=):	19
MacAdam (SDCM):	3
Through-wiring (mm2):	5x2,5
Color:	White
Length [mm]:	1500mm
Height [mm]:	49,5mm
Width [mm]:	162,6mm
Weight [kg]:	3,4kg

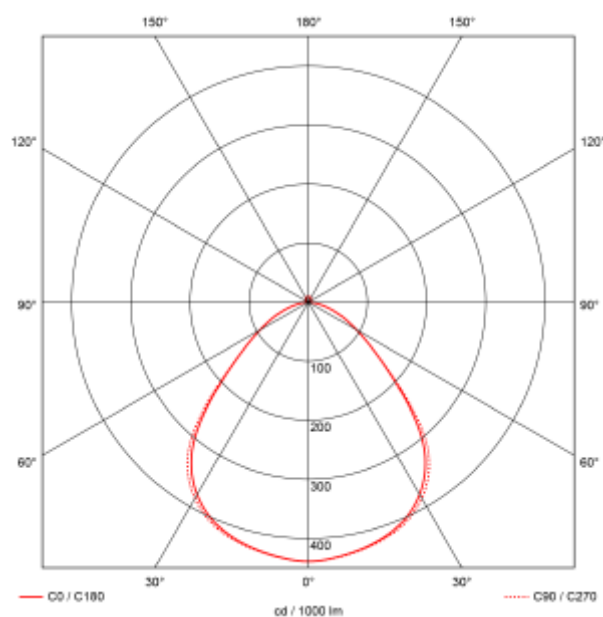

Uniplus is a surface mounted luminaire with the latest technology and optics to ensure a high luminous efficiency and low glare.

-Low glare UGR19 -Up to 150lm/w -Easy and fast installation.

-Suspended installation (accessory) DALI2 driver