




## FDV SPEC SHEET

Uniplus Interior

Art. no: 103052-90-3



Lighting Solutions

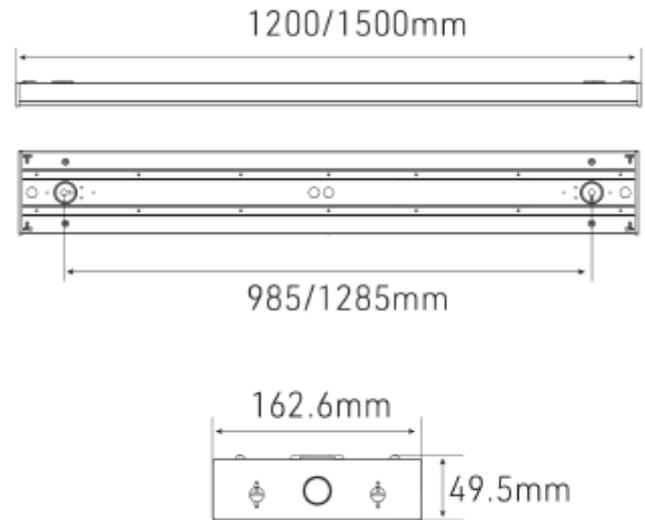

# Uniplus Interior



Art. no: 103052-90-3

### LIGHT TECHNICAL

Lightsource Type:	LED (replaceable)
Lumen Output:	5669
Lumen LED (tc=25):	6200
Beam Angle:	90°
CCT (Color Temperature):	3000
CRI / Ra:	80
Color Code:	830
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	QuickConnect
Through-wiring (mm2):	5x2,5
Mounting:	Suspended, Ceiling, Surface

### ELECTRICAL DATA

Dimming:	None
Flickerfree:	Yes
Flicker metric (Pst LM) <:	1
Stroboscopic effect metric (SVM) <:	0,04
System Power [W]:	23/29/34/40
System Voltage [V]:	230V 50Hz
Protection Class:	1
Max load pr circuit - B10:	20
Max load pr circuit - B16:	32
Max load pr circuit - C10:	34
Max load pr circuit - C16:	54
Leakage current [mA]:	0,7
Inrush current Imax [A]:	35
Inrush current time [µs]:	250
Socket / Cap-Base:	N/A
Current Output [mA]:	22mA



## FDV SPEC SHEET

Uniplus Interior

Art. no: 103052-90-3



*Lighting Solutions*

### PRODUCT

Ingress Protection:	IP40
Impact Protection:	IK06
Operating Temperature [°C]:	-20 - 40
Lifetime [h]:	L80B10: 100 000
Color:	White
RAL:	RAL9003
Length [mm]:	1500
Height [mm]:	49,5
Width [mm]:	162,6
Weight [kg]:	3,4
Housing Material :	Steel