



PRODUCT SHEET


Pollux

Art. no: 2112-120-3

NORLUX®


Lighting Solutions

Pollux

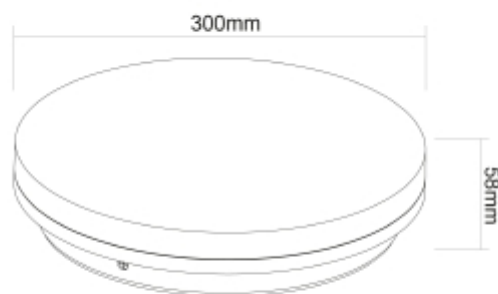

SPECIFICATIONS

Lightsource Type:	LED (built in)
System Power [W]:	18W
CCT (Color Temperature):	3/4/5700
CRI / Ra:	80
Lumen Output:	1644 (4000K)lm
Lumen LED (tc=25):	1750lm
Beam Angle:	120
Lens (Diffuser):	Opal
Dimming:	None
Flickerfree:	Yes
System Voltage [V]:	230V 50Hz
Connection:	QuickConnect
Mounting:	Ceiling, Surface
Lifetime [h]:	L80B10: 100 000h
Lumen/W:	91lm/W
MacAdam (SDCM):	3
Color:	White
Height [mm]:	58mm
Width [mm]:	300mm
Weight [kg]:	1,05kg

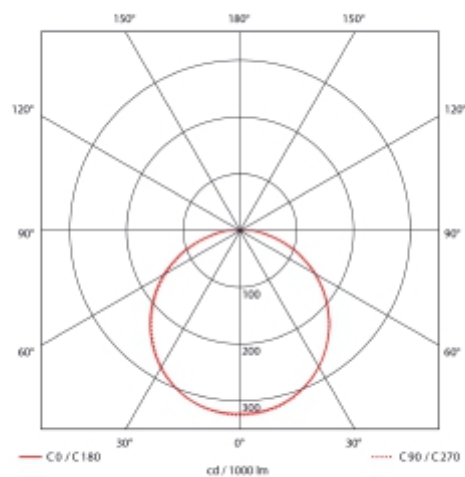

Pollux is a surface mounted ceiling light that adopts high lumen SMD LED, fire-rated PC diffuser with even light output. IP54 waterproof structural design, it's an ideal replacement for wet locations. Comes with a switch option between 3000K (default), 4000K and 5700K. QuickConnect for easy installation. All data is based on 4000K.