





## FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-2



Lighting Solutions

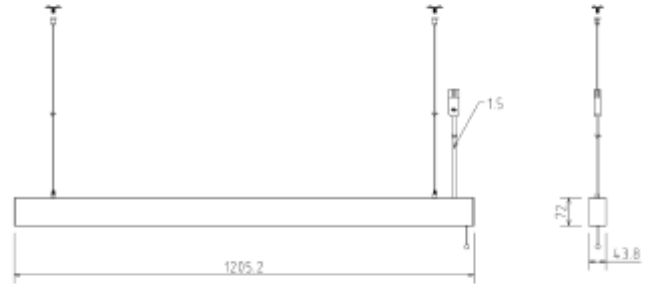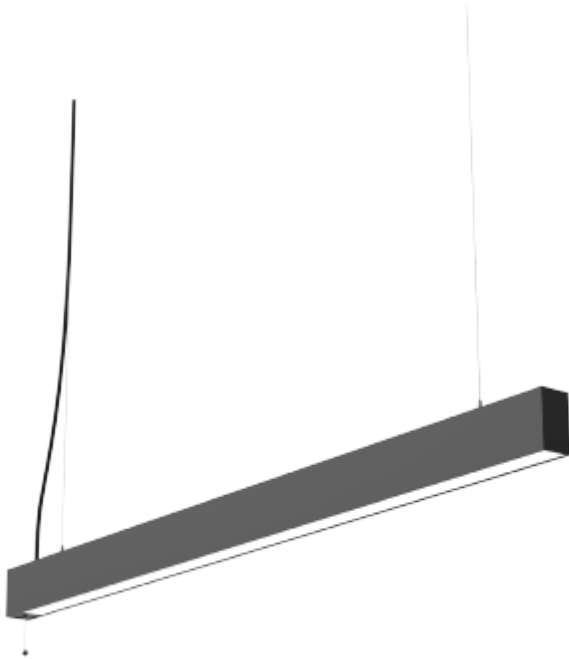

# Benu Office Pullswitch



Art. no: 3733-110-2

### LIGHT TECHNICAL

Lightsource Type:	LED (built in)
Lumen Output:	5200
Lumen LED (tc=25):	7000
Beam Angle:	110° / 75°
CCT (Color Temperature):	4000
CRI / Ra:	90
Color Code:	940
MacAdam (SDCM):	3
Lens (Diffuser):	Micropris.
UGR (<=):	19

### MOUNTING / CONNECTION

Connection:	18i3 Quick connection
Mounting:	Suspended, Pendant, Ceiling



## FDV SPEC SHEET

Benu Office Pullswitch

Art. no: 3733-110-2



*Lighting Solutions*

PRODUCT		ELECTRICAL DATA	
Ingress Protection:	IP20	Dimming:	DALI2
Impact Protection:	IK02	Dimming Output Type:	Amplitude Modulation
Operating Temperature [°C]:	-25 - 45	Flickerfree:	Yes
Lifetime [h]:	L80: 100 000	Standby power P <sub>sb</sub> (W) <:	0,5
Color:	White	Flicker metric (P <sub>st</sub> LM) <:	0,002
RAL:	RAL9003	Stroboscopic effect metric (SVM) <	0,003
Length [mm]:	1205	System Power [W]:	50
Height [mm]:	72	System Voltage [V]:	230V 50Hz
Width [mm]:	44	Protection Class:	1
Weight [kg]:	2,5	Max load pr circuit - B10:	28
Housing Material :	Aluminium	Max load pr circuit - B16:	45
Diffuser Material:	PMMA	Max load pr circuit - C10:	28
		Max load pr circuit - C16:	45
		Leakage current [mA]:	0,7
		Inrush current I <sub>max</sub> [A]:	4,75
		Inrush current time [µs]:	162
		Socket / Cap-Base:	N/A
		Current Output [mA]:	1200
		Voltage Forward Min [V]:	2,9
		Voltage Forward Max [V]:	3,3