


ART. NO.

101141-660-2-ddd
101142-660-2-ddd
101142-660-2-p
101142-660-3-p
101141-660-2-p

101141-660-3-ddd
101141-660-3-p
101140-660-2
101142-660-3-ddd

NORLUX®

Lighting Solutions

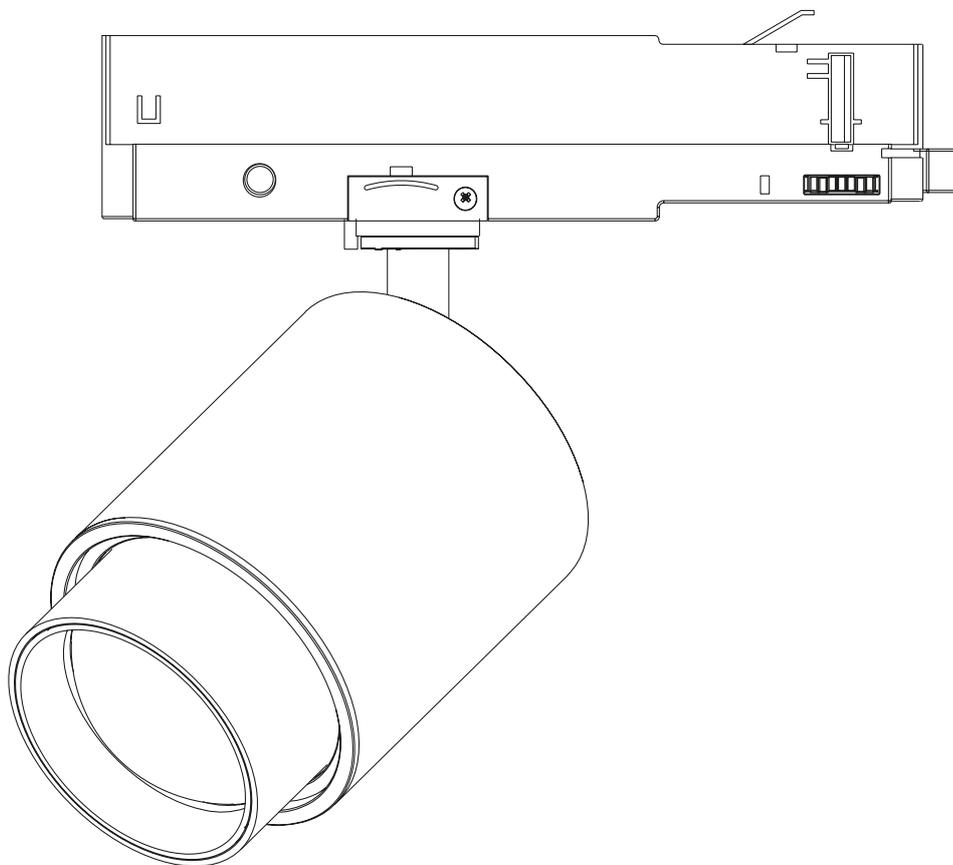

Zoom Spotlight

INSTALLATION MANUAL




⚠ Safety Notes:

- The product must be installed, maintained, and operated as instructions below.
- Before starting installation of this product, make sure power supply is disconnected.
- Only to be installed by authorized electrician.
- Do not use abrasives or solvents when cleaning.
- Do not install the product if it appears damaged in any way. Check with manufacturer if in doubt.
- Do not modify this fitting in any matter as this will void warranty.
- Check protection class, if class I, it must be earthed.
- Disconnect power supply before maintenance or cleaning.

⚠ Sikkerhetsinformasjon:

- Følg installasjonsmanual for korrekt montering.
- Koble alltid fra strømmen før montering eller vedlikehold.
- Kan kun monteres av autorisert elektriker.
- Monter ikke produktet hvis det er synlig skade. Kontakt forhandler eller produsent.
- Bruk ikke løsemidler ved rengjøring
- Produktet skal ikke under noen omstendigheter endres eller modifiseres.
- Sjekk produktets isolasjonsklasse. Ved isolasjonsklasse I skal produktet jordes.

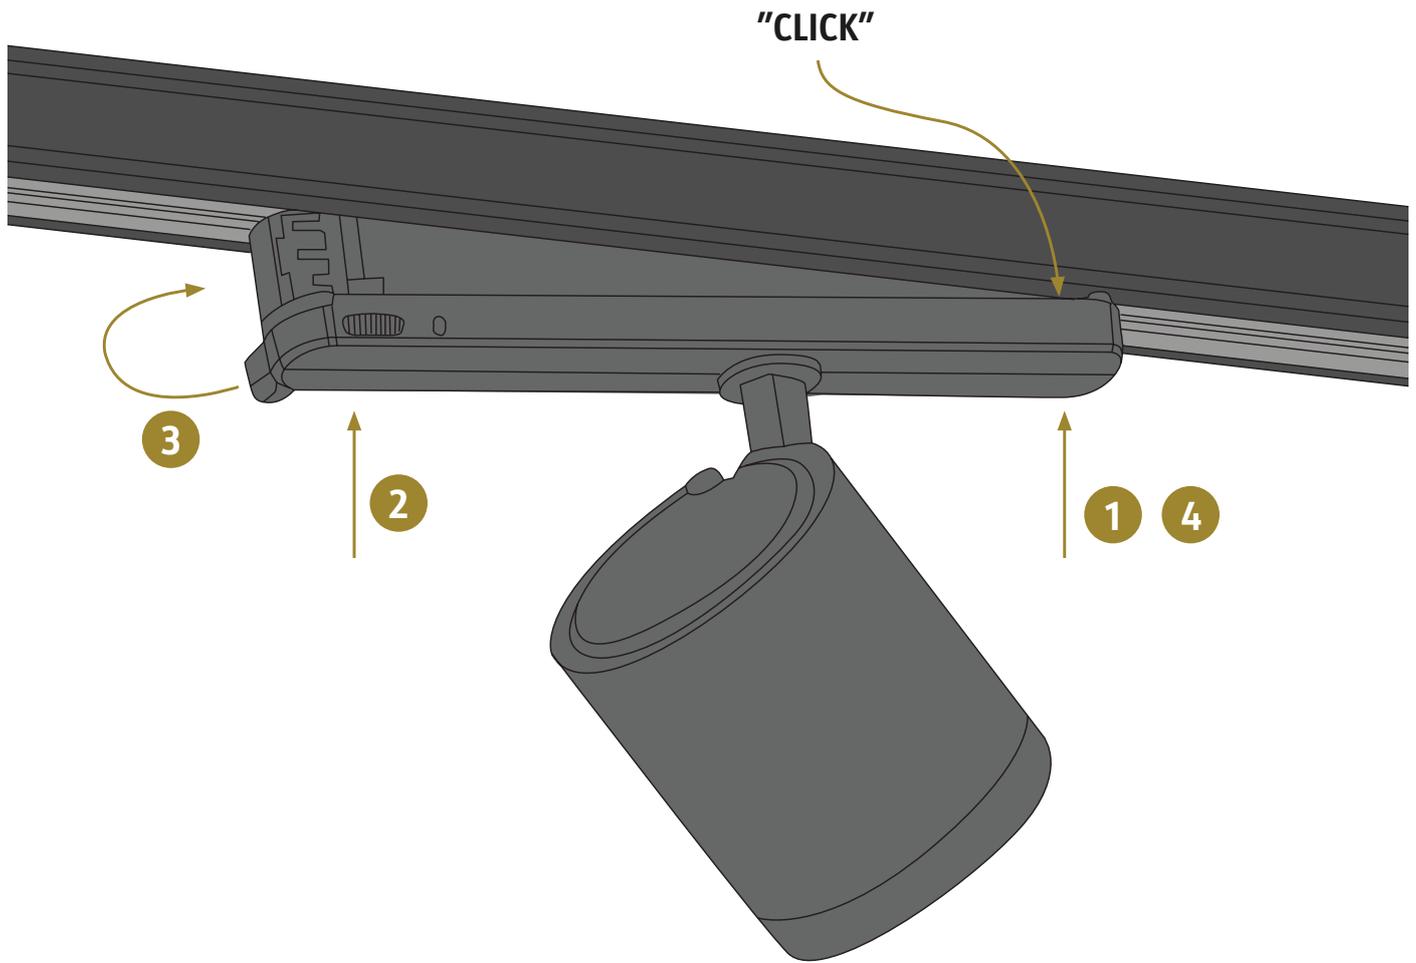

Installation

⚠ Before beginning the installation of the luminaires, ensure that the track is wired and installed according to the provided instructions. When connecting the adapter, ensure it is installed in the correct direction to avoid any issues. Follow the steps below carefully, as connecting the adapter incorrectly may result in 400V being supplied to the luminaires.

- 1 Fix the non-electrical end of the adapter driver into the track.
A distinctive click sound and feel indicates proper fixing.
- 2 Fix the electrical end of the adapter driver into the track.
Make sure there is no gap between the track and the adapter.
- 3 Turn the handle to the locked position. If there is resistance in the handle, unplug the adapter as it is installed the wrong way. Choose phase 1, 2 or 3 by rotating the phase selector wheel.
- 4 Check and verify proper installation by ensuring that the non-electrical end of the adapter driver is locked.