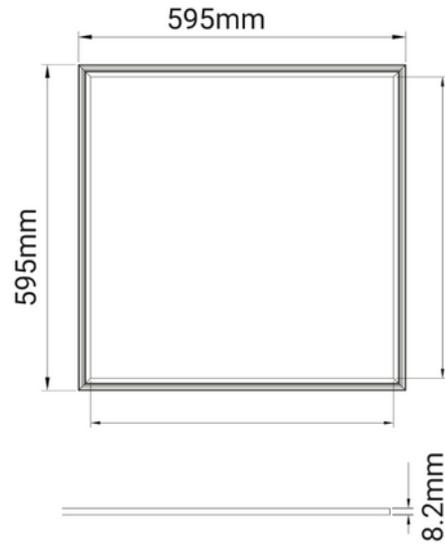


**PRODUCT DATA SHEET**

Panel 595x595 4900lm 840 36W Prism WH EPN0024 w/o driver

Art.no: 0340-4-02-3

*Lighting Solutions*

Panel 595x595 4900lm 840 36W Prism WH EPN0024 w/o driver



Panel LED is a light fixture for interior use. It is constructed for fitting in to suspended ceilings. Panel LED's can be installed as a pendant or mounted on ceiling surfaces. The Panel LED has an opal or micro prismatic diffuser. Choose between ON/OFF, Phase-Cut or DALI2 (CLO, Corridor, Push dim and Ready2mains) driver. See accessories for detailed information.

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK05
IP (system)	IP40
Outdoor	No
Operating temperature (°C)	-10 - 40

**PRODUCT DATA SHEET**

Panel 595x595 4900lm 840 36W Prism WH EPN0024 w/o driver

Art.no: 0340-4-02-3

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	110
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Lens (Diffuser)	Micropris.
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
Manufacturer (driver)	No driver
CC (driver) [mA]	null - null
CC (forward voltage driver) (V)	null - null

DIMENSIONS	
Length (product) (mm)	595.0
Width (product) (mm)	595.0
Height (product) (mm)	8.2
Weight (product) (kg)	2.97

MATERIALS AND SURFACES	
Color	White
Housing Material	Aluminium
Diffuser Material	PMMA

INSTALLATION AND CONNECTION	
Areas of use	Generally, Hotel, Office, School, Shop
Mounting	Recessed, Ceiling
Connection (system)	EPN0024

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Panel 595x595 4900lm 840 36W Prism WH EPN0024 w/o driver

Art.no: 0340-4-02-3



Lighting Solutions

ALTERNATIVE DRIVERS	
Current Setting (mA) ?	900

LIGHT DISTRIBUTION

