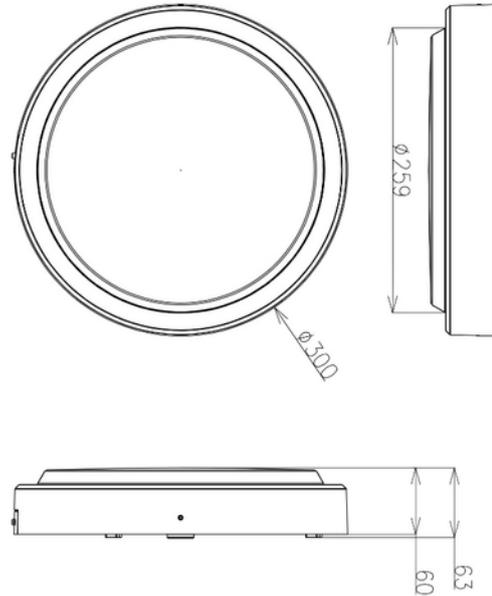
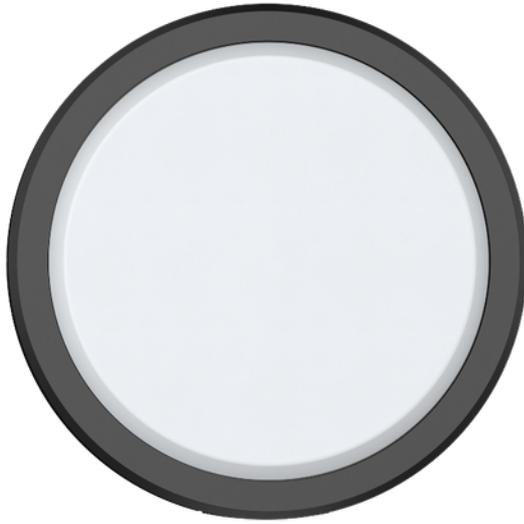


**PRODUCT DATA SHEET**

Yil 1750lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-01-7

*Lighting Solutions*

Yil 1750lm 830/840/857 120° 10/15W Dark Grey IP65



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK10
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	113
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Yil 1750lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-01-7

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lens (Diffuser)	PC Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.9
Dimming (driver)	None
CC (driver) [mA]	190 - null
CC (forward voltage driver) (V)	60.0 - 75.0
CV (driver) [V]	180
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - C10	37
Max load pr circuit - C16	59
Leakage current (mA)	0.75
Inrush current time (µs)	51.0
Inrush current I _{max} (A)	2.46

DIMENSIONS	
Width (product) (mm)	300.0
Height (product) (mm)	63.0
Weight (product) (kg)	2.04

MATERIALS AND SURFACES	
Color	Dark Grey
RAL Code	RAL7022
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Outdoor
Mounting	Wall, Ceiling
Connection (system)	QuickConnect



PRODUCT DATA SHEET

Yil 1750lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-01-7



Lighting Solutions

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	G
CE mark	Yes

LIGHT DISTRIBUTION

