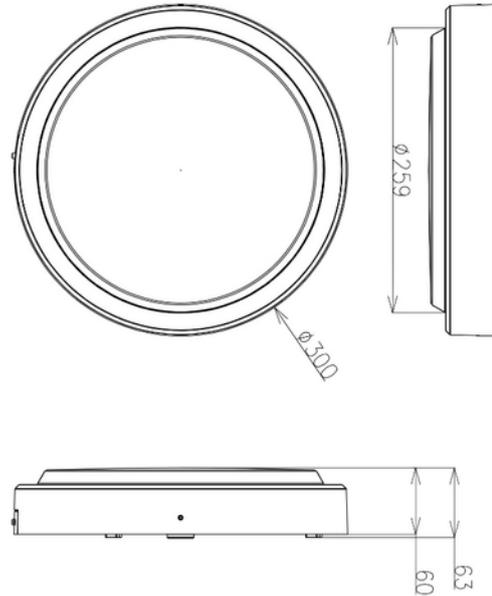


**PRODUCT DATA SHEET**

Yil Eyelid 1100lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-04-7

*Lighting Solutions*

## Yil Eyelid 1100lm 830/840/857 120° 10/15W Dark Grey IP65



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK10
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	70
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Yil Eyelid 1100lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-04-7

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lens (Diffuser)	PC Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
CC (driver) [mA]	190 - null
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0
Max load pr circuit - C10	37
Max load pr circuit - C16	59
Leakage current (mA)	0.75
Inrush current time ( $\mu$ s)	51.0
Inrush current I <sub>max</sub> (A)	2.46

DIMENSIONS	
Width (product) (mm)	300.0
Height (product) (mm)	67.0
Weight (product) (kg)	2.04

MATERIALS AND SURFACES	
Color	Dark Grey
RAL Code	RAL7022
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Outdoor
Mounting	Wall, Ceiling
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	G
CE mark	Yes



**PRODUCT DATA SHEET**

Yil Eyelid 1100lm 830/840/857 120° 10/15W Dark Grey IP65

Art.no: 10100-2-04-7



*Lighting Solutions*

**LIGHT DISTRIBUTION**

