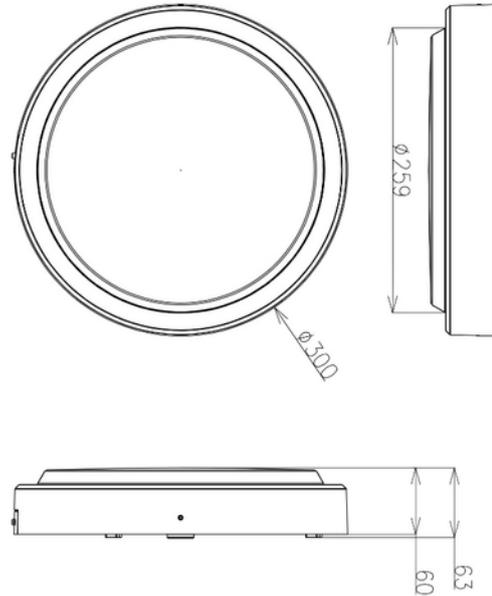


**PRODUCT DATA SHEET**

Yil 2900lm 830/840/857 120° 20/25W BK IP65 DALI

Art.no: 10101-2-01-2-ddd

*Lighting Solutions*

Yil 2900lm 830/840/857 120° 20/25W BK IP65 DALI



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK10
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 45

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	110
CRI / Ra (>=)	80

**PRODUCT DATA SHEET**

Yil 2900lm 830/840/857 120° 20/25W BK IP65 DALI

Art.no: 10101-2-01-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CCT (Color Temperature) (K)	3/4/5700
Color Code	830/840/857
Lens (Diffuser)	PC Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3

DRIVER	
Max load pr circuit - B10	48
Max load pr circuit - B16	76
Max load pr circuit - C10	48
Max load pr circuit - C16	76
Leakage current (mA)	0.7

DIMENSIONS	
Width (product) (mm)	300.0
Height (product) (mm)	63.0
Weight (product) (kg)	2.04

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Outdoor
Mounting	Wall, Ceiling
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
CE mark	Yes



PRODUCT DATA SHEET

Yil 2900lm 830/840/857 120° 20/25W BK IP65 DALI

Art.no: 10101-2-01-2-ddd



Lighting Solutions

LIGHT DISTRIBUTION

