


**PRODUCT DATA SHEET**

Circular 12000lm 830 120W Ø2060mm BK DALI 3m cable
Art.no: 101303-120-2-ddd



Lighting Solutions

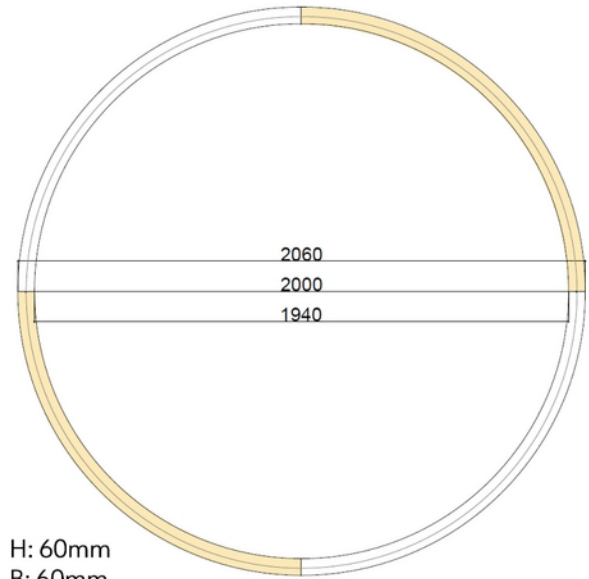

Circular 12000lm 830 120W Ø2060mm BK DALI 3m cable



Circular decorative pendant with direct lighting. The fixture comes with opal diffuser and DALI2 driver. Available in 4 sizes with 3000K.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK09
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	-30 - 55

**PRODUCT DATA SHEET**

Circular 12000lm 830 120W Ø2060mm BK DALI 3m cable

Art.no: 101303-120-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B20: 50 000
MacAdam (SDCM)	5
UGR (<=)	22

DRIVER	
Manufacturer (driver)	Boke
Protection Class (driver)	1
IP (driver)	IP20
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	3 - 42
CC (forward voltage driver) (V)	2300.0 - 1650.0
Output Current Tolerance (%)	5.0
Max load pr circuit - B16	13
Max load pr circuit - C16	15
Leakage current (mA)	1.5
Inrush current time (µs)	130.0
Inrush current I _{max} (A)	60.0

DIMENSIONS	
Length (product) (mm)	60.0
Height (product) (mm)	60.0
Weight (product) (kg)	12.5
Diameter (product) (mm)	2060.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium
Diffuser Material	Polycarbonate



PRODUCT DATA SHEET

Sircular 12000lm 830 120W Ø2060mm BK DALI 3m cable
Art.no: 101303-120-2-ddd



Lighting Solutions

INSTALLATION AND CONNECTION	
Areas of use	Hotel, Office, Shop, Showroom
Mounting	Ceiling, Pendant
Connection (system)	Cable 3m

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A+