




PRODUCT DATA SHEET

X-Flood 175200lm 1200W 740 Assymetric F14 w/ BC BK IP66 DALI

Art.no: 101313-14-2-BC-ddd

NORLUX®

Lighting Solutions

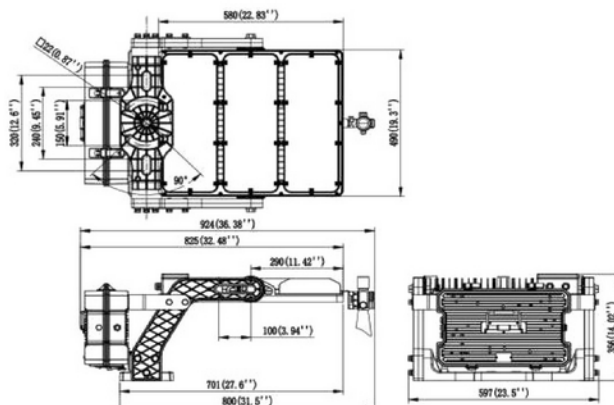

X-Flood 175200lm 1200W 740 Assymetric F14 w/ BC BK IP66 DALI



X-Flood LED sports light is designed for high mounting application, such as large soccer field and plazas. This convenient and humanized design enable it fit for different requests in outdoor lighting applications and minimize glare and control the uniformity. Module could be adjusted vertically and horizontally to get the best light uniformity. 1200W 4000K with multiple optics options. Efficiency up to 140lm/W, 160lm/W, more energy saving. Provided with 20KV Build-in Surge Protection Devices Excellent anti-corrosion performance.

ELECTRICAL DATA

Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA

IK (system)	IK08
IP (system)	IP66

**PRODUCT DATA SHEET**

X-Flood 175200lm 1200W 740 Assymetric F14 w/ BC BK IP66 DALI

Art.no: 101313-14-2-BC-ddd

*Lighting Solutions*

TECHNICAL DATA	
Outdoor	Yes
Operating temperature (°C)	-30 - 40
Wind force (EPA) (m ²) at 0°	0.39

PHOTOMETRIC DATA	
CRI / Ra (>=)	70
CCT (Color Temperature) (K)	4000
Color Code	740
Lightsource Type	LED (built in)
Lens (Diffuser)	Lens
Lifetime (h)	L80B10: 100 000

DRIVER	
Surge Protection	L/N-PE = 20KV, L_N = 10KV

DIMENSIONS	
Length (product) (mm)	700.0
Width (product) (mm)	145.0
Height (product) (mm)	510.0
Weight (product) (kg)	33.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Outdoor, Sports areas
Mounting	Wall, Mast
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

X-Flood 175200lm 1200W 740 Assymetric F14 w/ BC BK IP66 DALI

Art.no: 101313-14-2-BC-ddd



Lighting Solutions