


**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 20° 7W BK 3-Circuit  
Art.no: 101390-7-20-2



*Lighting Solutions*

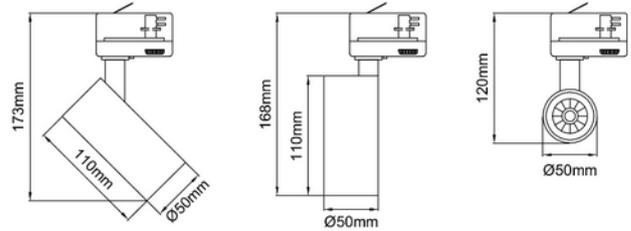

## Silindir 50 Short 850lm 927 20° 7W BK 3-Circuit



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700
Color Code	927
Lens (Diffuser)	Clear

**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 20° 7W BK 3-Circuit  
Art.no: 101390-7-20-2



*Lighting Solutions*

PHOTOMETRIC DATA	
MacAdam (SDCM)	3

DRIVER	
Manufacturer (driver)	HEP
Protection Class (driver)	2
Max Output Voltage (V)	33
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	2.7 - 19.2
Output Current Tolerance (%)	5.0
Current Ripple (%)	20.0
Max load pr circuit - B10	79
Max load pr circuit - B16	127
Max load pr circuit - C10	79
Max load pr circuit - C16	127
Max load pr circuit - C20	158
Inrush current time ( $\mu$ s)	30.0
Inrush current I <sub>max</sub> (A)	15.0

DIMENSIONS	
Length (product) (mm)	110.0
Width (product) (mm)	50.0
Weight (product) (kg)	0.3

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit



**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 20° 7W BK 3-Circuit  
Art.no: 101390-7-20-2



*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A

**LIGHT DISTRIBUTION**

