


**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 20° 7W WH 3-Circuit
Art.no: 101390-7-20-3



Silindir 50 Short 850lm 927 20° 7W WH 3-Circuit

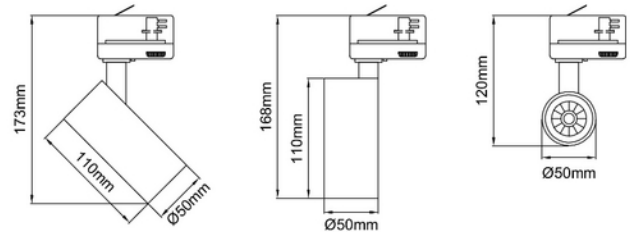

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700
Color Code	927
Lens (Diffuser)	Clear

**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 20° 7W WH 3-Circuit
Art.no: 101390-7-20-3



Lighting Solutions

PHOTOMETRIC DATA

MacAdam (SDCM)	3
----------------	---

DRIVER

Max Output Voltage (V)	33
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	2.7 - 19.2
Max load pr circuit - C20	158

DIMENSIONS

Length (product) (mm)	110.0
Width (product) (mm)	50.0
Weight (product) (kg)	0.3

MATERIALS AND SURFACES

Color	White
-------	-------

INSTALLATION AND CONNECTION

Areas of use	Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Silindir 50 Short 850lm 927 20° 7W WH 3-Circuit
Art.no: 101390-7-20-3



Lighting Solutions

LIGHT DISTRIBUTION

