


**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 30° 7W BK 3-Circuit
Art.no: 101390-7-30-2



Lighting Solutions

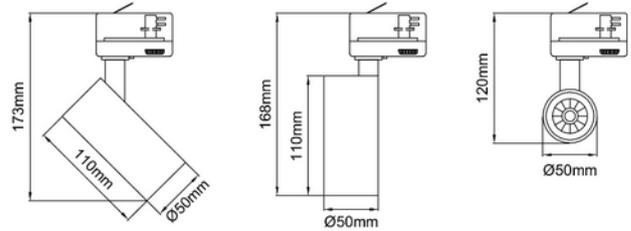

Silindir 50 Short 850lm 927 30° 7W BK 3-Circuit



| ELECTRICAL DATA | |
|---------------------------|-----------|
| Protection Class (system) | 1 |
| Dimming (system) | None |
| Voltage (system) [V] | 230V 50Hz |

| TECHNICAL DATA | |
|----------------|------|
| IP (system) | IP20 |
| Outdoor | No |

| PHOTOMETRIC DATA | |
|-----------------------------|-------|
| CRI / Ra (>=) | 90 |
| CCT (Color Temperature) (K) | 2700 |
| Color Code | 927 |
| Lens (Diffuser) | Clear |

**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 30° 7W BK 3-Circuit
Art.no: 101390-7-30-2



Lighting Solutions

| PHOTOMETRIC DATA | |
|------------------|---|
| MacAdam (SDCM) | 3 |

| DRIVER | |
|--|------------|
| Manufacturer (driver) | HEP |
| Protection Class (driver) | 2 |
| Max Output Voltage (V) | 33 |
| IP (driver) | IP20 |
| Expected Lifetime (driver) (h) | 30000 |
| Constant current or voltage (CC or CV) | CC |
| CC (driver) [mA] | 350 - null |
| CC (forward voltage driver) (V) | 2.7 - 19.2 |
| Output Current Tolerance (%) | 5.0 |
| Current Ripple (%) | 20.0 |
| Max load pr circuit - B10 | 79 |
| Max load pr circuit - B16 | 127 |
| Max load pr circuit - C10 | 79 |
| Max load pr circuit - C16 | 127 |
| Max load pr circuit - C20 | 158 |
| Inrush current time (μ s) | 30.0 |
| Inrush current I _{max} (A) | 15.0 |

| DIMENSIONS | |
|-----------------------|-------|
| Length (product) (mm) | 110.0 |
| Width (product) (mm) | 50.0 |
| Weight (product) (kg) | 0.3 |

| MATERIALS AND SURFACES | |
|------------------------|-------|
| Color | Black |

| INSTALLATION AND CONNECTION | |
|-----------------------------|-----------------|
| Areas of use | Shop, Showroom |
| Mounting | Track, Ceiling |
| Connection (system) | Track 3-Circuit |



PRODUCT DATA SHEET

Silindir 50 Short 850lm 927 30° 7W BK 3-Circuit
Art.no: 101390-7-30-2



Lighting Solutions

| ENERGY AND CERTIFICATIONS | |
|---------------------------|---------|
| CE mark | Yes |
| Energy Efficiency Class | A++ - A |

LIGHT DISTRIBUTION

