


**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 30° 7W WH 3-Circuit  
Art.no: 101390-7-30-3



*Lighting Solutions*

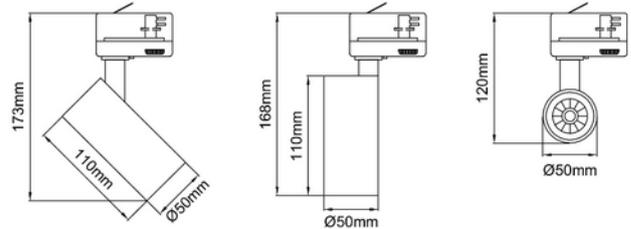

## Silindir 50 Short 850lm 927 30° 7W WH 3-Circuit



ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700
Color Code	927
Lens (Diffuser)	Clear

**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 30° 7W WH 3-Circuit

Art.no: 101390-7-30-3

*Lighting Solutions*

PHOTOMETRIC DATA	
MacAdam (SDCM)	3

DRIVER	
Max Output Voltage (V)	33
IP (driver)	IP20
Expected Lifetime (driver) (h)	30000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - null
CC (forward voltage driver) (V)	2.7 - 19.2
Max load pr circuit - C20	158

DIMENSIONS	
Length (product) (mm)	110.0
Width (product) (mm)	50.0
Weight (product) (kg)	0.3

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



**PRODUCT DATA SHEET**

Silindir 50 Short 850lm 927 30° 7W WH 3-Circuit  
Art.no: 101390-7-30-3



*Lighting Solutions*

**LIGHT DISTRIBUTION**

