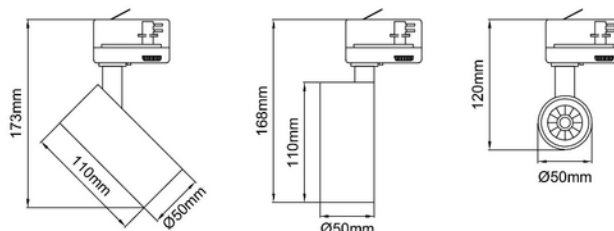


**PRODUKTDATABLAD**

Silindir 50 Short 900lm 930 20° 7W BK 3-Circuit

Art.no: 101391-7-20-2

*Lighting Solutions*

Silindir 50 Short 900lm 930 20° 7W BK 3-Circuit



ELEKTRISKE DATA	
Beskyttelsesklasse	1
Dimmefunksjon (system)	Ingen
Spenning (V)	230V 50Hz
Driftspenning LED (mA)	180
Effekt (system) (W)	7

TEKNISK DATA	
IP (system)	IP20
Produkt Familie	Silindir 50 Short
Utendørs	No

LYSTEKNISKE DATA	
Kald lumen (t=25) fra chip (lm)	900

**PRODUKTDATABLAD**

Silindir 50 Short 900lm 930 20° 7W BK 3-Circuit

Art.no: 101391-7-20-2

*Lighting Solutions*

LYSTEKNISKE DATA	
Fargegjengivelse (CRI / Ra) ($\geq$)	90
Fargetemperatur (CCT) (K)	3000
Fargekode	930
Linse (Diffusor)	Klar
Strålevinkel (°)	20°
MacAdam (SDCM)	3

DIMENSJONER	
Lengde (produkt) (mm)	110.0
Bredde (produkt) (mm)	50.0
Vekt (produkt) (kg)	0.3

MATERIALER OG OVERFLATER	
Farge	Sort

MONTERING OG TILKOBLING	
Bruksområde	Butikk, Showrom
Montering	Skinne, Tak
Tilkobling (system)	Skinne 3-Tenning

ENERGI OG GODKJENNING	
CE-merke	Yes
Energy Efficiency Class	A++ - A