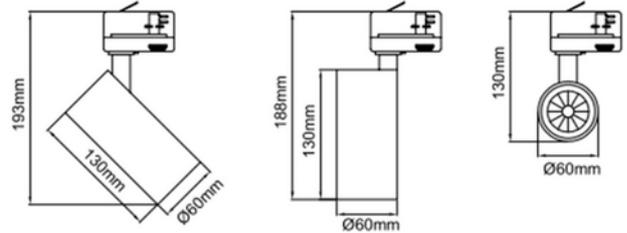


**FDV DOCUMENTATION**

Silindir 60 1550lm 927 20° 15W BK 3-circuit phasecut

Art.no: 1014060-20-2-p

*Lighting Solutions*

Silindir 60 1550lm 927 20° 15W BK 3-circuit phasecut



SPECIFICATIONS	
Forward Voltage LED (max tp=25) (V)	37.5
Forward Voltage LED (min tp=65) (V)	31.5
CC (driver) [mA]	350
CC (forward voltage driver) (V)	43.0
Inrush current time (μ s)	10.0
Inrush current I _{max} (A)	15.0
Length (product) (mm)	188.0
Width (product) (mm)	60.0



FDV DOCUMENTATION

Silindir 60 1550lm 927 20° 15W BK 3-circuit phasecut

Art.no: 1014060-20-2-p



Lighting Solutions

LIGHT DISTRIBUTION

