


**PRODUCT DATA SHEET**

Silindir 60 1550lm 927 40° 15W BK 3-circuit  
Art.no: 1014060-40-2



*Lighting Solutions*

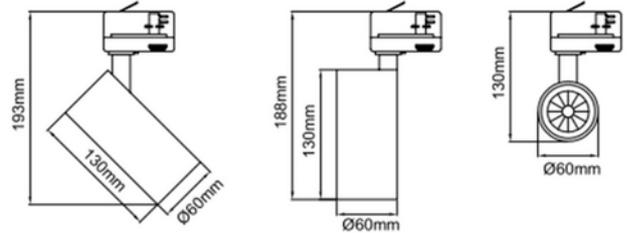

## Silindir 60 1550lm 927 40° 15W BK 3-circuit



Silindir 60 is a modern and flexible spotlight with high efficiency and high CRI. The driver is built inside the lamp and you can tilt the spotlight 90° and rotate 350°.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700

**PRODUCT DATA SHEET**

Silindir 60 1550lm 927 40° 15W BK 3-circuit

Art.no: 1014060-40-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	927
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Tridonic
Forward Current LED (min-max) (mA)	250 - 500
Forward Voltage LED (max tp=25) (V)	37.5
Driftspenning LED (min tp=65) (V)	31.5

DIMENSIONS	
Length (product) (mm)	188.0
Width (product) (mm)	60.0

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Shop, Showroom
Mounting	Track
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++



**PRODUCT DATA SHEET**

Silindir 60 1550lm 927 40° 15W BK 3-circuit

Art.no: 1014060-40-2



*Lighting Solutions*

**LIGHT DISTRIBUTION**

