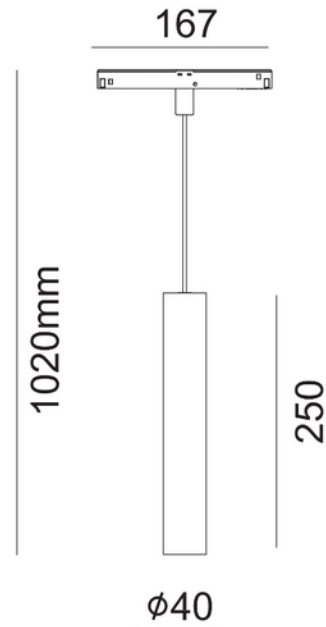


**PRODUCT DATA SHEET**

Flare Pendant 40 927 640lm 36° 6,6W Evo BK DALI

Art.no: 101490-36-2-ddd

*Lighting Solutions*

Flare Pendant 40 927 640lm 36° 6,6W Evo BK DALI



Flare Pendant 40 is a variant that fits our Evo 48W Track system. This pendant is with its sleek design and high lumen output, is a perfect fit for cabins, hotels, housing and restaurants.

ELECTRICAL DATA	
Dimming (system)	DALI
Voltage (system) [V]	48VDC

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	97
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	2700

**PRODUCT DATA SHEET**

Flare Pendant 40 927 640lm 36° 6,6W Evo BK DALI

Art.no: 101490-36-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	927
Socket / Cap-Base	N/A
Manufacturer (light source)	Citizen

DRIVER	
Manufacturer (driver)	HEP
Standby power Psb (W) <	0.5
Max Output Voltage (V)	48
Dimming Minimum Level (%)	5.0
Dimming output type	Amplitude Modulation
Expected Lifetime (driver) (h)	50000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 700
CC (forward voltage driver) (V)	6.0 - 40.0
Output Current Tolerance (%)	5.0
Current Ripple (%)	5.0

DIMENSIONS	
Width (product) (mm)	40.0
Height (product) (mm)	250.0

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Hotel, Residence, Restaurant
Mounting	Track
Connection (system)	Track EVO 48V

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Flare Pendant 40 927 640lm 36° 6,6W Evo BK DALI

Art.no: 101490-36-2-ddd



Lighting Solutions

LIGHT DISTRIBUTION

