


**PRODUCT DATA SHEET**

Rod Midi T 4100lm 930 20° 23W BK 3-circuit
 Art.no: 101820-20-2

*Lighting Solutions*

Rod Midi T 4100lm 930 20° 23W BK 3-circuit

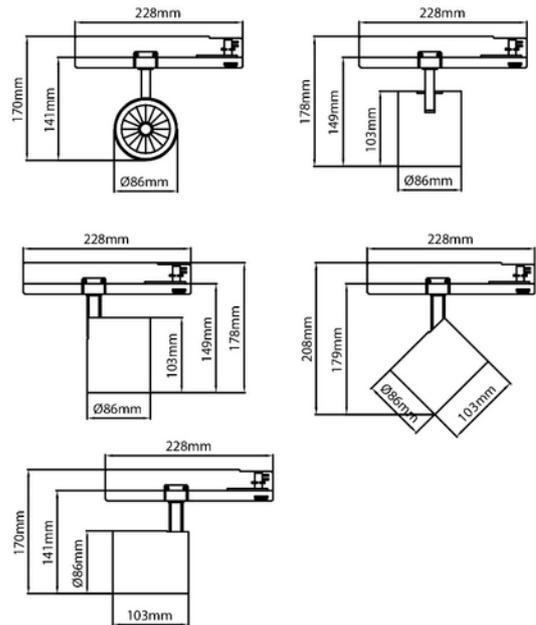

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No
Operating temperature (°C)	0 - 35

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	143
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Rod Midi T 4100lm 930 20° 23W BK 3-circuit

Art.no: 101820-20-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
Manufacturer (light source)	Bridgelux

DRIVER	
Manufacturer (driver)	Tridonic
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	162.0
Height (product) (mm)	178.0
Weight (product) (kg)	0.626
Diameter (product) (mm)	86.0

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	E
CE mark	Yes
Energy Efficiency Class	A++ - A



PRODUCT DATA SHEET

Rod Midi T 4100lm 930 20° 23W BK 3-circuit

Art.no: 101820-20-2



Lighting Solutions

LIGHT DISTRIBUTION

