



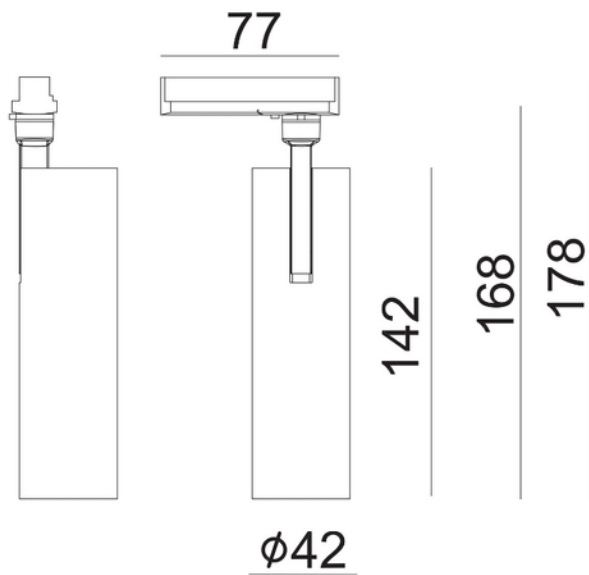

Tania Mini Slim 850lm 927 36° 9W 1-circuit BK phasecut



SPECIFICATIONS	
Operating temperature (°C)	40
Forward Voltage LED (max tp=25) (V)	38.1
Forward Voltage LED (min tp=65) (V)	32.3
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	100.0
Inrush current I _{max} (A)	5.0
Height (product) (mm)	142.0
Weight (product) (kg)	0.3
Diameter (product) (mm)	42.0