




**FDV DOCUMENTATION**

Tania Mini Slim Basic 850lm 927 36° 9W WH Downlight phasecut  
Art.no: 101920-36-3-p

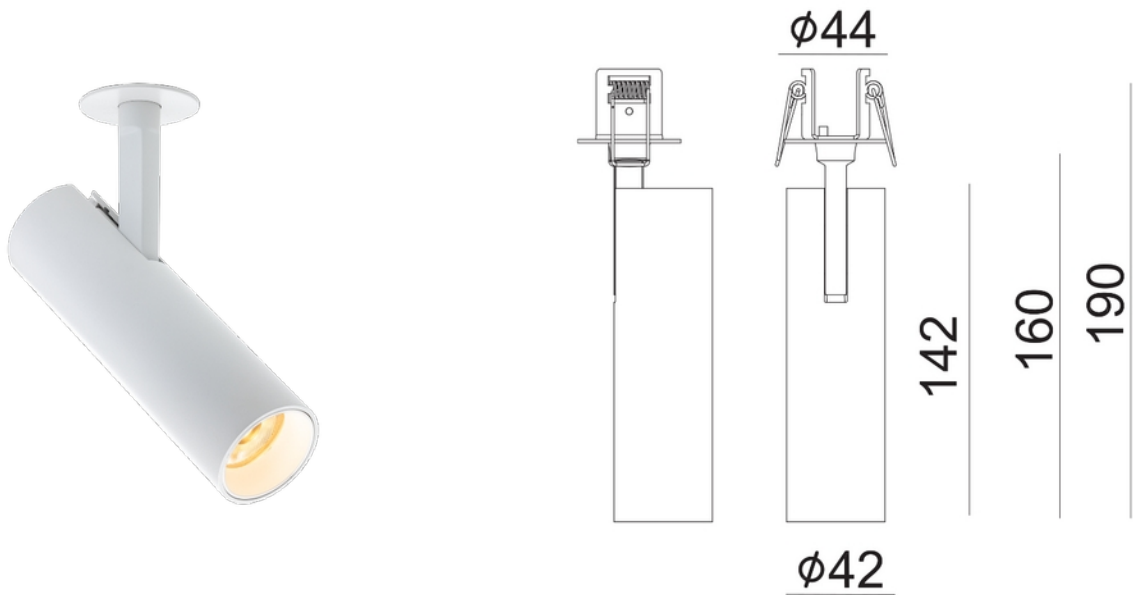

# Tania Mini Slim Basic 850lm 927 36° 9W WH Downlight phasecut



| SPECIFICATIONS                      |       |
|-------------------------------------|-------|
| Operating temperature (°C)          | 40    |
| Forward Voltage LED (max tp=25) (V) | 38.1  |
| Forward Voltage LED (min tp=65) (V) | 32.3  |
| CC (forward voltage driver) (V)     | 40.0  |
| Inrush current time (µs)            | 100.0 |
| Inrush current I <sub>max</sub> (A) | 5.0   |
| Height (product) (mm)               | 142.0 |
| Diameter (product) (mm)             | 42.0  |