


**FDV DOCUMENTATION**

Tania Mini Slim Basic 850lm 930 36° 9W BK Downlight phasecut
 Art.no: 101921-36-2-p

*Lighting Solutions*

Tania Mini Slim Basic 850lm 930 36° 9W BK Downlight phasecut

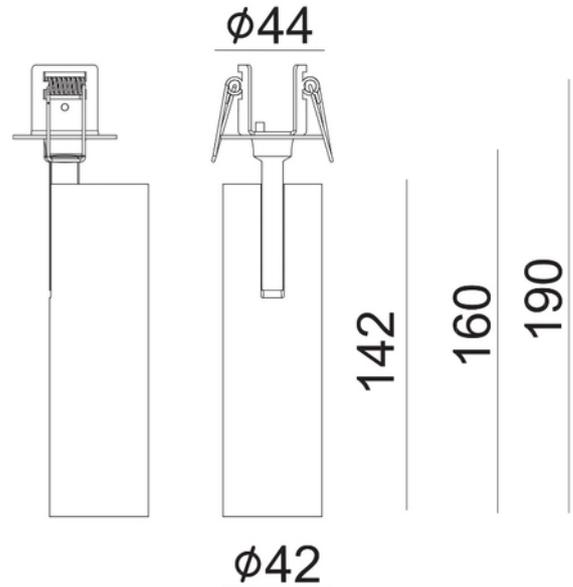

SPECIFICATIONS	
Operating temperature (°C)	40
Forward Voltage LED (max tp=25) (V)	38.1
Forward Voltage LED (min tp=65) (V)	32.3
CC (forward voltage driver) (V)	40.0
Inrush current time (μ s)	100.0
Inrush current I _{max} (A)	5.0
Height (product) (mm)	142.0
Diameter (product) (mm)	42.0