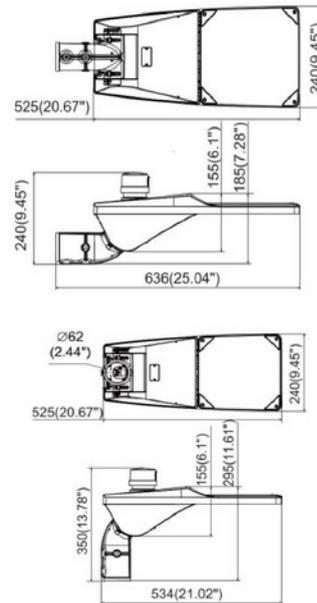


**FDV DOCUMENTATION**

Joule 8500lm 740 50W P3 Assymmetric IP66 GR Dali2 5m=C Ø60

Art.no: 102011-03-1-ddd

*Lighting Solutions*

Joule 8500lm 740 50W P3 Assymmetric IP66 GR Dali2 5m=C Ø60



SPECIFICATIONS	
Operating temperature (°C)	50
Wind force (EPA) (m ²) at 0°	0.149
Forward Voltage LED (max tp=25) (V)	6.2
Forward Voltage LED (min tp=65) (V)	5.6
CC (driver) [mA]	1560
CC (forward voltage driver) (V)	56.0
Inrush current time (µs)	39.0
Inrush current I _{max} (A)	63.6
Length (product) (mm)	636.0
Width (product) (mm)	185.0
Height (product) (mm)	240.0
Weight (product) (kg)	5.9



FDV DOCUMENTATION

Joule 8500lm 740 50W P3 Assymetric IP66 GR Dali2 5m=C Ø60

Art.no: 102011-03-1-ddd



Lighting Solutions

LIGHT DISTRIBUTION

