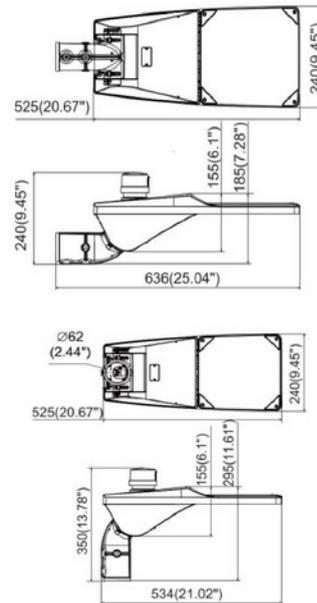


**FDV DOCUMENTATION**

Joule 12000lm 740 70W P3 Assymetric IP66 GR 5m cable Ø60mm

Art.no: 102012-03-1

*Lighting Solutions*

Joule 12000lm 740 70W P3 Assymetric IP66 GR 5m cable Ø60mm



SPECIFICATIONS	
Operating temperature (°C)	50
Wind force (EPA) (m ²) at 0°	0.15
Forward Voltage LED (max tp=25) (V)	5.4
Forward Voltage LED (min tp=65) (V)	5.34
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	108.0
Inrush current time (µs)	210.0
Inrush current I _{max} (A)	54.0
Length (product) (mm)	615.0
Width (product) (mm)	350.0
Height (product) (mm)	225.0
Weight (product) (kg)	6.0



FDV DOCUMENTATION

Joule 12000lm 740 70W P3 Assymetric IP66 GR 5m cable Ø60mm

Art.no: 102012-03-1



Lighting Solutions

LIGHT DISTRIBUTION

