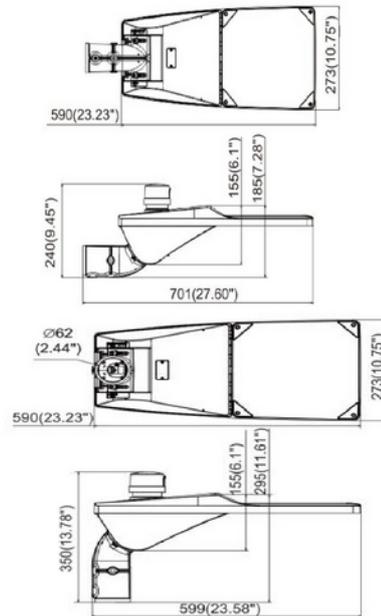


**FDV DOCUMENTATION**

Joule 15000lm 740 90W P3 Assymetric IP66 GR 8m cable Ø60mm

Art.no: 102013-03-1

*Lighting Solutions*

Joule 15000lm 740 90W P3 Assymetric IP66 GR 8m cable Ø60mm



SPECIFICATIONS	
Operating temperature (°C)	50
Wind force (EPA) (m ²) at 0°	0.186
Forward Voltage LED (max tp=25) (V)	5.45
Forward Voltage LED (min tp=65) (V)	5.4
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	150.0
Inrush current time (µs)	400.0
Inrush current I _{max} (A)	50.0
Length (product) (mm)	680.0
Width (product) (mm)	350.0
Height (product) (mm)	225.0
Weight (product) (kg)	7.1



FDV DOCUMENTATION

Joule 15000lm 740 90W P3 Assymetric IP66 GR 8m cable Ø60mm

Art.no: 102013-03-1



Lighting Solutions

LIGHT DISTRIBUTION

