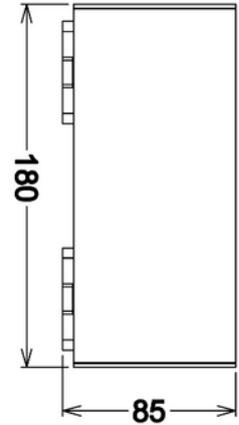
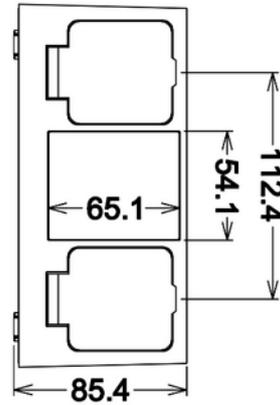


**PRODUCT DATA SHEET**

Talos 1100lm 830 100° 8W Black IP54 w/Sockets Phasecut

Art.no: 102070-100-2-p

*Lighting Solutions*

Talos 1100lm 830 100° 8W Black IP54 w/Sockets Phasecut



Outdoor luminaire with direct light and double outlet. Dimmable by phasecut. Easy installation with screwless terminal block. Made of powder coated aluminum. Included accessories: 4 spacer blocks for surface mounting

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	Phase-Cut
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP54
Outdoor	Yes
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Talos 1100lm 830 100° 8W Black IP54 w/Sockets Phasecut

Art.no: 102070-100-2-p

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	121
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 50.000
MacAdam (SDCM)	3
Manufacturer (light source)	Bridgelux
Forward Voltage LED (max tp=25) (V)	40.0
Driftspenning LED (min tp=65) (V)	30.0

DRIVER	
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC

DIMENSIONS	
Length (product) (mm)	180.0
Width (product) (mm)	85.0
Height (product) (mm)	85.0
Weight (product) (kg)	0.92

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005
Housing Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Cottage, Outdoor, Residence
Mounting	Wall
Connection (system)	QuickConnect



PRODUCT DATA SHEET

Talos 1100lm 830 100° 8W Black IP54 w/Sockets Phasecut

Art.no: 102070-100-2-p



Lighting Solutions

ENERGY AND CERTIFICATIONS

CE mark	Yes
---------	-----