


**FDV DOCUMENTATION**

Cylinder 60 G2 800lm D2W 36° (15°&24°) 15W WH 1-cir phasec  
Art.no: 102251-D2W-36-3-p



*Lighting Solutions*

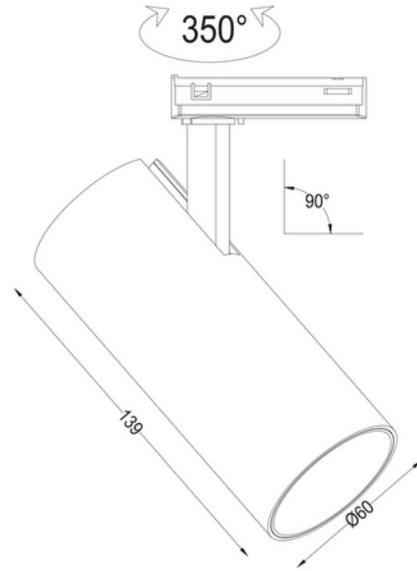

## Cylinder 60 G2 800lm D2W 36° (15°&24°) 15W WH 1-cir phasec



SPECIFICATIONS	
Power (system) (W)	15
Operating temperature (°C)	45
Lumen Out (system) (lm)	800
Forward Voltage LED (max tp=25) (V)	37.0
Forward Voltage LED (min tp=65) (V)	30.6
CC (driver) [mA]	367
CC (forward voltage driver) (V)	39.0
Inrush current time (µs)	400.0
Inrush current I <sub>max</sub> (A)	12.0
Length (product) (mm)	130.0
Height (product) (mm)	130.0
Weight (product) (kg)	0.5



### FDV DOCUMENTATION

Cylinder 60 G2 800lm D2W 36° (15°&24°) 15W WH 1-cir phasec

Art.no: 102251-D2W-36-3-p



*Lighting Solutions*

### SPECIFICATIONS

Diameter (product) (mm)	60.0
-------------------------	------

### LIGHT DISTRIBUTION

