


**FDV DOCUMENTATION**

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W BK 3-cir DALI
 Art.no: 102261-36-2-ddd

*Lighting Solutions*

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W BK 3-cir DALI

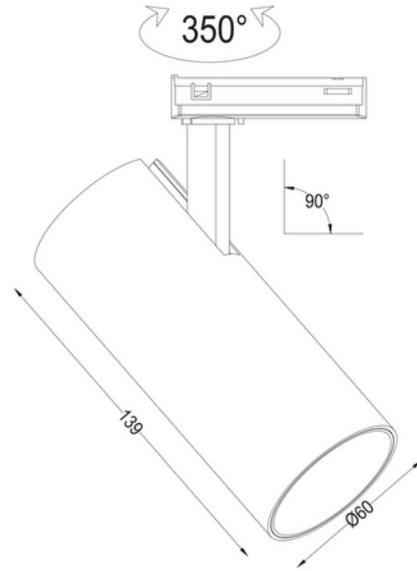

SPECIFICATIONS	
Power (system) (W)	15
Operating temperature (°C)	45
Lumen Out (system) (lm)	1420
Forward Voltage LED (max tp=25) (V)	36.2
Forward Voltage LED (min tp=65) (V)	32.0
CC (driver) [mA]	700
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	2.8
Inrush current I _{max} (A)	18.0
Length (product) (mm)	130.0
Height (product) (mm)	130.0
Weight (product) (kg)	0.56
Diameter (product) (mm)	60.0



FDV DOCUMENTATION

Cylinder 60 G2 1400lm 930 36° (15°&24°) 15W BK 3-cir DALI

Art.no: 102261-36-2-ddd



Lighting Solutions

LIGHT DISTRIBUTION

