





PRODUCT DATA SHEET

Rod Midi C 4100lm ArcticWhite 932 20° 23W GR 3-circuit

Art.no: 102314-20-1



Lighting Solutions

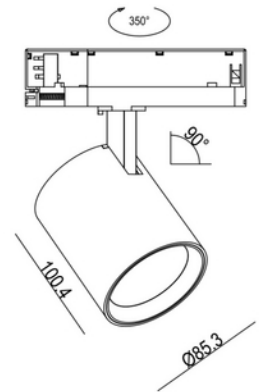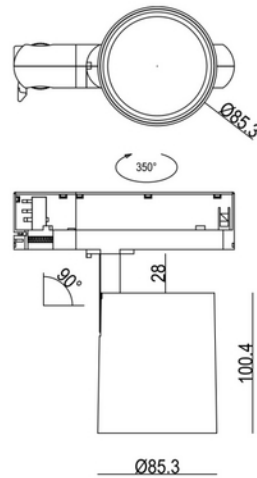

Rod Midi C 4100lm ArcticWhite 932 20° 23W GR 3-circuit



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP20
IP Front/Back (system)	IP20/20
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Rod Midi C 4100lm ArcticWhite 932 20° 23W GR 3-circuit

Art.no: 102314-20-1

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	130
CRI / Ra ($\geq$)	90
CCT (Color Temperature) (K)	3200
Color Code	932
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR ($\leq$)	19
Manufacturer (light source)	Bridgelux
Forward Current LED (min-max) (mA)	250 - 1260
Forward Voltage LED (max tp=25) (V)	38.0
Driftspenning LED (min tp=65) (V)	33.0

DRIVER	
Manufacturer (driver)	Boke
Flicker-free	Yes

DIMENSIONS	
Height (product) (mm)	115.0
Weight (product) (kg)	0.66
Diameter (product) (mm)	97.0

MATERIALS AND SURFACES	
Color	Grey
RAL Code	RAL7035
Corrosion Class	C1
Surface treatment	Powdercoated
Housing Material	Aluminium
Housing Material %	47.4
Diffuser Material	Aluminium
Diffuser Material%	1.7000000000000002
Material 2%	42.4
Material 4%	0.0

**PRODUCT DATA SHEET**

Rod Midi C 4100lm ArcticWhite 932 20° 23W GR 3-circuit

Art.no: 102314-20-1

*Lighting Solutions*

MATERIALS AND SURFACES	
Material 5%	0.04
Material 6%	1.5
Material 7%	6.959999999999999

INSTALLATION AND CONNECTION	
Areas of use	Cafe, Generally, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	D
CE mark	Yes
EPD number	NEPD-14829-15548