


**PRODUCT DATA SHEET**

Rod Maxi C 3700lm ArcticWhite 932 30° 27W BK 3-circuit
 Art.no: 102324-30-2

*Lighting Solutions*

Rod Maxi C 3700lm ArcticWhite 932 30° 27W BK 3-circuit

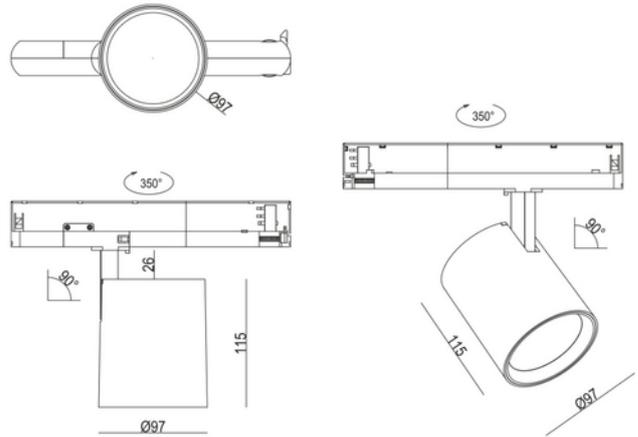

ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz
Emergency light (h)	No Emergency light

TECHNICAL DATA	
IK (system)	IK02
IP (system)	IP20
IP Front/Back (system)	IP20/20
Product Family	Rod Maxi C
Outdoor	No
Operating temperature (°C)	-20 - 45

**PRODUCT DATA SHEET**

Rod Maxi C 3700lm ArcticWhite 932 30° 27W BK 3-circuit
Art.no: 102324-30-2



Lighting Solutions

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	137
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3200
Color Code	932
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Bridgelux
Forward Current LED (min-max) (mA)	250 - 1260
Forward Voltage LED (max tp=25) (V)	38.0
Driftspenning LED (min tp=65) (V)	33.0

DRIVER	
Manufacturer (driver)	Boke
Protection Class (driver)	2
Standby power Psb (W) <	0.5
Flicker metric (Pst LM) <	0.037
Stroboscopic effect metric (SVM) <	0.009
Max Output Voltage (V)	42
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Flicker-free	Yes
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	300 - 1050
Current setting (driver)	DIP-switch
CC (forward voltage driver) (V)	10.0 - 42.0
Surge Protection	L-N = 2KV
CV (driver) [V]	36
Output Current Tolerance (%)	5.0
Current Ripple (%)	3.0
Max load pr circuit - B10	38
Max load pr circuit - B16	62

**PRODUCT DATA SHEET**

Rod Maxi C 3700lm ArcticWhite 932 30° 27W BK 3-circuit

Art.no: 102324-30-2

*Lighting Solutions*

DRIVER	
Max load pr circuit - C10	38
Max load pr circuit - C16	62
Max load pr circuit - C20	77
Max load pr circuit - C25	96
Max load pr circuit - C32	122
Leakage current (mA)	0.26
Inrush current time (μ s)	68.0
Inrush current I _{max} (A)	1.86

DIMENSIONS	
Height (product) (mm)	115.0
Weight (product) (kg)	0.75
Diameter (product) (mm)	97.0

MATERIALS AND SURFACES	
Color	Black
RAL Code	RAL9005
Corrosion Class	C1
Surface treatment	Powdercoated
Housing Material	Aluminium
Diffuser Material	Aluminium

INSTALLATION AND CONNECTION	
Areas of use	Inndoor, Generally, Industrial, Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	D
CE mark	Yes



PRODUCT DATA SHEET

Rod Maxi C 3700lm ArcticWhite 932 30° 27W BK 3-circuit

Art.no: 102324-30-2



Lighting Solutions

LIGHT DISTRIBUTION

