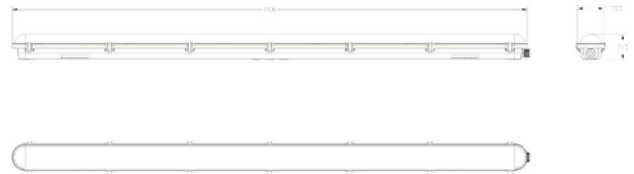


**PRODUCT DATA SHEET**

Stream I 6800lm 840 Opal 120° 40W 5x2,5 L:1500mm

Art.no: 102431-02

*Lighting Solutions*

## Stream I 6800lm 840 Opal 120° 40W 5x2,5 L:1500mm



ELECTRICAL DATA	
Protection Class (system)	2
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP65
Outdoor	Yes
Operating temperature (°C)	-20 - 35
Through-wiring (mm <sup>2</sup> )	5x2,5

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	156

**PRODUCT DATA SHEET**

Stream I 6800lm 840 Opal 120° 40W 5x2,5 L:1500mm

Art.no: 102431-02

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000

DRIVER	
Manufacturer (driver)	Lifud
Flicker metric (Pst LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Dimming (driver)	None
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	200 - 350
CC (forward voltage driver) (V)	58.0 - 114.0
Output Current Tolerance (%)	5.0
Max load pr circuit - B10	33
Max load pr circuit - B16	54
Max load pr circuit - C10	56
Max load pr circuit - C16	90
Leakage current (mA)	0.7
Inrush current time (µs)	170.0
Inrush current I <sub>max</sub> (A)	16.0

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	79.5
Height (product) (mm)	84.5
Weight (product) (kg)	2.0

MATERIALS AND SURFACES	
Color	Grey
Housing Material	Polycarbonate



## PRODUCT DATA SHEET

Stream I 6800lm 840 Opal 120° 40W 5x2,5 L:1500mm

Art.no: 102431-02



*Lighting Solutions*

INSTALLATION AND CONNECTION	
Areas of use	Industrial, Outdoor, Parking, Residence
Mounting	Surface, Wall, Ceiling, Pendant
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	C
CE mark	Yes

## LIGHT DISTRIBUTION

