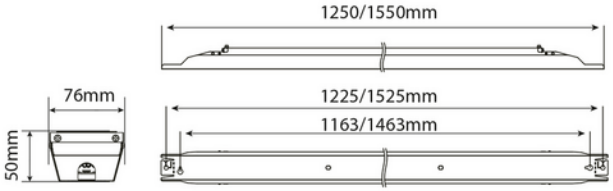


# C Line 11000lm 830 60/52/44/35W Wide 5x2,5 Steel 1250mm

CE 230V 50Hz IP23 IK08

C A↑G

C Line is an industrial lighting fixture designed for ceiling mounting. The fixture has many applications, such as in industrial and warehouse settings. It features through-wiring (5×2.5 mm²), ensuring efficient and tool-free installation.

| **ELECTRICAL DATA** | |
|---|---|
| Protection Class (system) | 1 |
| Dimming (system) | None |
| Voltage (system) [V] | 230V 50Hz |

| **TECHNICAL DATA** | |
|---|---|
| IK (system) | IK08 |
| IP (system) | IP23 |
| Outdoor | No |
| Operating temperature (°C) | -20 - 40 |

| PHOTOMETRIC DATA | |
|---|---|
| Efficacy (system) (lm/W) | 165 |
| CRI / Ra (>=) | 80 |
| CCT (Color Temperature) (K) | 3000 |
| Color Code | 830 |
| Lightsource Type | LED (replaceable) |
| Lens (Diffuser) | Clear |
| Lifetime (h) | L80: 100 000 |
| MacAdam (SDCM) | 3 |
| Manufacturer (light source) | Shenzhen Jufei Optoelectronics |
| Forward Current LED (min-max) (mA) | 0 - 150 |

| DRIVER | |
|---|---|
| Manufacturer (driver) | Boke |
| Flicker-free | Yes |

| DIMENSIONS | |
|---|---|
| Length (product) (mm) | 1250.0 |
| Width (product) (mm) | 76.0 |
| Heigth (product) (mm) | 50.0 |
| Weight (product) (kg) | 2.04 |

| MATERIALS AND SURFACES | |
|---|---|
| Color | Steel |

| INSTALLATION AND CONNECTION | |
|---|---|
| Areas of use | Generally, Industrial |
| Mounting | Surface, Ceiling |
| Connection (system) | Quickconnectx2 |

| ENERGY AND CERTIFICATIONS | |
|---|---|
| Energy Class EPREL | C |
| CE mark | Yes |
| EPD number | NEPD-11058-11008 |
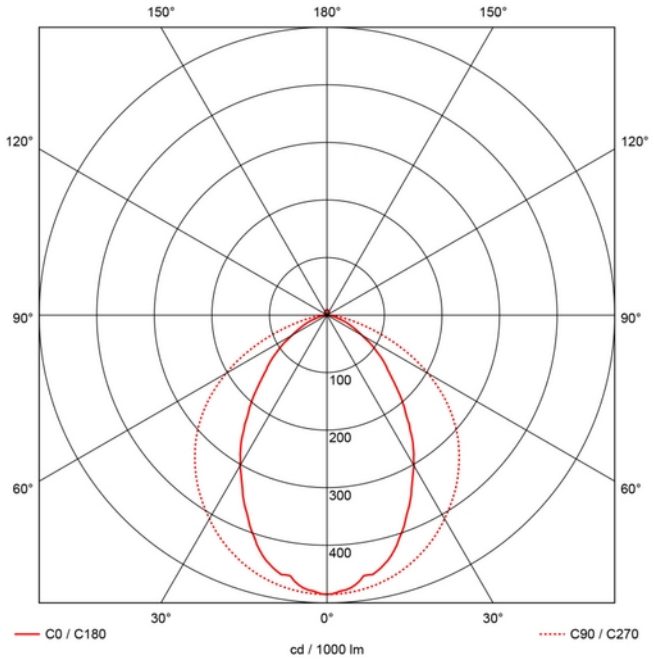
## LIGHT DISTRIBUTION