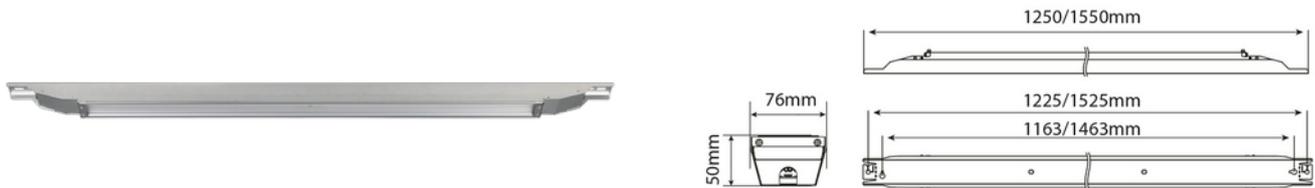


**PRODUCT DATA SHEET**

C Line 19800lm 840 100/83/65/57/48W Med 5x2,5 Steel 1550mm

Art.no: 102517-2-00-1

*Lighting Solutions*

C Line 19800lm 840 100/83/65/57/48W Med 5x2,5 Steel 1550mm



C Line is an industrial lighting fixture designed for ceiling mounting. The fixture has many applications, such as in industrial and warehouse settings. It features through-wiring (5x2.5 mm²), ensuring efficient and tool-free installation.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK08
IP (system)	IP23
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

C Line 19800lm 840 100/83/65/57/48W Med 5x2,5 Steel 1550mm

Art.no: 102517-2-00-1

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	180
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	4000
Color Code	840
Lightsource Type	LED (replaceable)
Lens (Diffuser)	Clear
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Shenzhen Jufei Optoelectronics
Forward Current LED (min-max) (mA)	0 - 150

DRIVER	
Manufacturer (driver)	Boke
Flicker-free	Yes
Max load pr circuit - B10	11
Max load pr circuit - B16	17
Max load pr circuit - C10	17
Max load pr circuit - C16	27
Max load pr circuit - C20	35
Max load pr circuit - C25	44
Leakage current (mA)	0.15

DIMENSIONS	
Length (product) (mm)	1550.0
Width (product) (mm)	76.0
Height (product) (mm)	50.0
Weight (product) (kg)	2.54

MATERIALS AND SURFACES	
Color	Steel

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial

**PRODUCT DATA SHEET**

C Line 19800lm 840 100/83/65/57/48W Med 5x2,5 Steel 1550mm

Art.no: 102517-2-00-1

*Lighting Solutions*

INSTALLATION AND CONNECTION	
Mounting	Surface, Ceiling
Connection (system)	Quickconnectx2

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	C
CE mark	Yes
EPD number	NEPD-11303-11244

LIGHT DISTRIBUTION