





PRODUCT DATA SHEET

NWC 20A Zone Controller with Dry Contact Port
Art.no: 102551-NW-07



Lighting Solutions



NWC 20A Zone Controller with Dry Contact Port



20A relay that provides wireless control of multiple light fixtures. By using a dry contact output (normally open/normally closed), signals can also be sent to third-party systems for integration, such as HVAC.

ELECTRICAL DATA	
Input Power	2400W maks 120V, 5540W maks 277V
Max Power (A)	20.0

TECHNICAL DATA	
IP (system)	IP20
Operating temperature (°C)	-30 - 55

CONTROL SYSTEM	
Norlux Wireless Connect	Implemented
Two-way radio frequency	Yes
Dimming	Class 2, 0-10V DC 10mA Maks
System	NWC

**PRODUCT DATA SHEET**


NWC 20A Zone Controller with Dry Contact Port
 Art.no: 102551-NW-07

*Lighting Solutions*

DIMENSIONS	
Length (product) (mm)	101.0
Width (product) (mm)	70.8
Height (product) (mm)	29.9

MATERIALS AND SURFACES	
Color	Grey

INSTALLATION AND CONNECTION	
Areas of use	Inndoor
Mounting	Surface

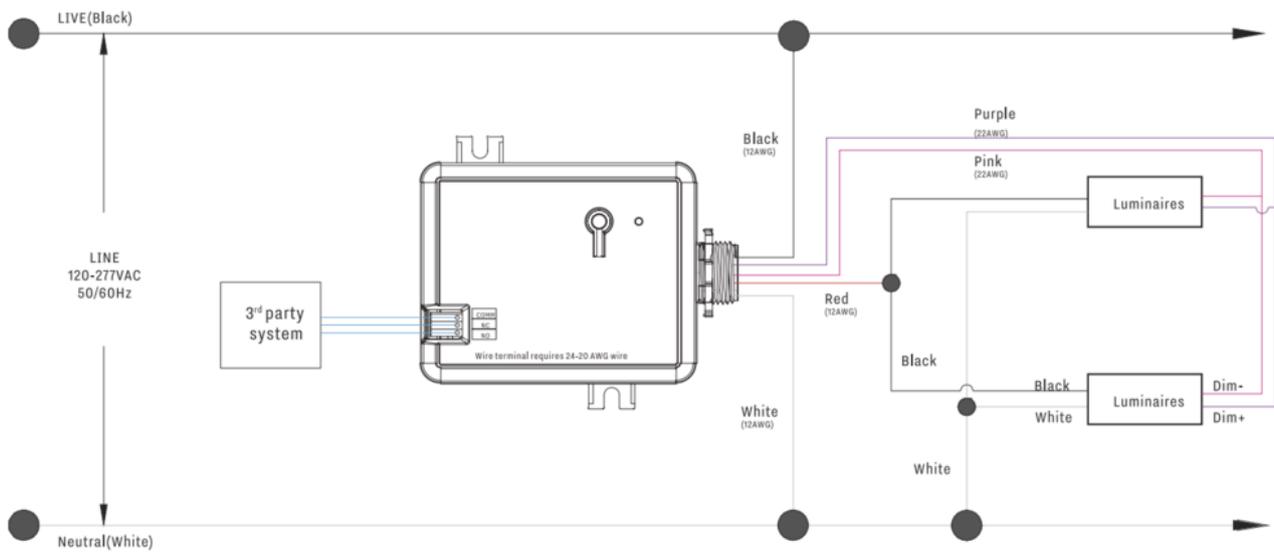WIRING

Please note: the "COMM/NC" is for normal close dry contact. "COMM/NO" is for normal open dry contact output.