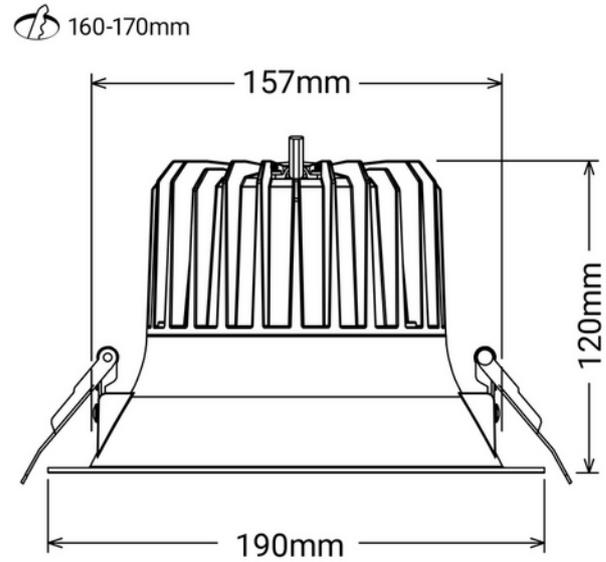


**FDV DOCUMENTATION**

Ceto R 2100lm 18W 930 36° BK 18i3 Phasecut IP44 Ø160-175mm

Art.no: 102791-36-2

*Lighting Solutions*

## Ceto R 2100lm 18W 930 36° BK 18i3 Phasecut IP44 Ø160-175mm



SPECIFICATIONS	
Operating temperature (°C)	45
Forward Voltage LED (max tp=25) (V)	40.0
Forward Voltage LED (min tp=65) (V)	30.0
CC (driver) [mA]	470
CC (forward voltage driver) (V)	40.0
Inrush current time (µs)	100.0
Inrush current I <sub>max</sub> (A)	5.0
Length (product) (mm)	190.0
Width (product) (mm)	190.0
Height (product) (mm)	120.0
Weight (product) (kg)	0.7
Diameter (product) (mm)	190.0



**FDV DOCUMENTATION**

Ceto R 2100lm 18W 930 36° BK 18i3 Phasecut IP44 Ø160-175mm

Art.no: 102791-36-2



*Lighting Solutions*

**LIGHT DISTRIBUTION**

