


**FDV DOCUMENTATION**

Proofsafe D 3250lm 830 105° 25/22/18/15W 600mm WH IP65 IK10
 Art.no: 102971-120-3

*Lighting Solutions*

Proofsafe D 3250lm 830 105° 25/22/18/15W 600mm WH IP65 IK10

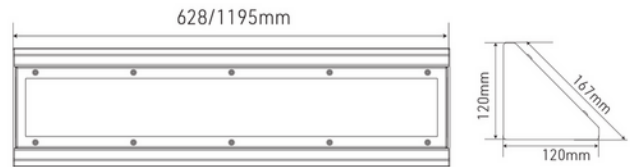

SPECIFICATIONS	
Operating temperature (°C)	40
Lumen Out (system) (lm)	3260
CC (driver) [mA]	350
Inrush current time (µs)	238.0
Inrush current I _{max} (A)	10.85
Length (product) (mm)	628.0
Width (product) (mm)	120.0
Height (product) (mm)	120.0
Weight (product) (kg)	3.23



FDV DOCUMENTATION

Proofsafe D 3250lm 830 105° 25/22/18/15W 600mm WH IP65 IK10

Art.no: 102971-120-3



Lighting Solutions

LIGHT DISTRIBUTION

