


**FDV DOCUMENTATION**

Proofsafe D 4700lm 830 105° 36/30/25/21W 1200mm WH IP65 IK10  
Art.no: 102973-120-3



*Lighting Solutions*

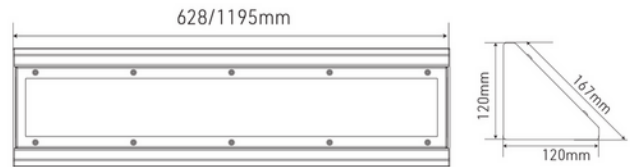

## Proofsafe D 4700lm 830 105° 36/30/25/21W 1200mm WH IP65 IK10



SPECIFICATIONS	
Operating temperature (°C)	40
Lumen Out (system) (lm)	4710
CC (driver) [mA]	350
Inrush current time (µs)	226.0
Inrush current I <sub>max</sub> (A)	18.1
Length (product) (mm)	1195.0
Width (product) (mm)	120.0
Height (product) (mm)	120.0
Weight (product) (kg)	6.56



**FDV DOCUMENTATION**

Proofsafe D 4700lm 830 105° 36/30/25/21W 1200mm WH IP65 IK10

Art.no: 102973-120-3



*Lighting Solutions*

**LIGHT DISTRIBUTION**

