
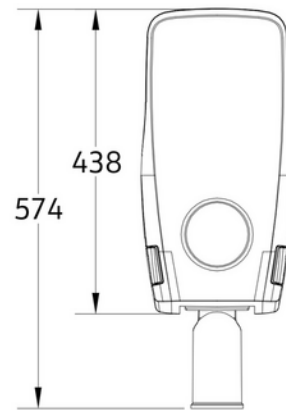


**FDV DOCUMENTATION**

Montana S 3.22GS20-Z 6m cable DALI

Art.no: 103023-20-GS-1

*Lighting Solutions*

## Montana S 3.22GS20-Z 6m cable DALI



SPECIFICATIONS	
Operating temperature (°C)	50
Wind force (EPA) (m <sup>2</sup> ) at 0°	0.11
Forward Voltage LED (max tp=25) (V)	22.2
Forward Voltage LED (min tp=65) (V)	21.7
CC (driver) [mA]	700
CC (forward voltage driver) (V)	56.0
Inrush current time (µs)	328.0
Inrush current I <sub>max</sub> (A)	30.2
Length (product) (mm)	574.0
Width (product) (mm)	219.0
Height (product) (mm)	124.0
Weight (product) (kg)	4.9
Diameter (product) (mm)	76.0



**FDV DOCUMENTATION**

Montana S 3.22GS20-Z 6m cable DALI

Art.no: 103023-20-GS-1



*Lighting Solutions*