
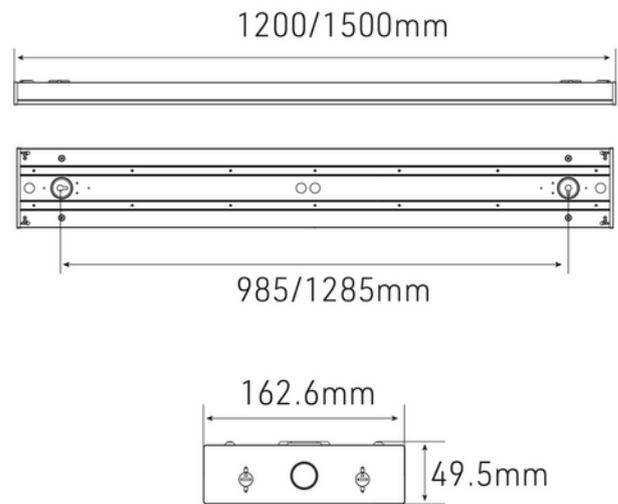


**PRODUCT DATA SHEET**Uniplus 6200lm 830 90° 40W 5x2,5mm<sup>2</sup> 1500mm WH DALI

Art.no: 103052-2-90-3-ddd

*Lighting Solutions*

## Uniplus 6200lm 830 90° 40W 5x2,5mm<sup>2</sup> 1500mm WH DALI

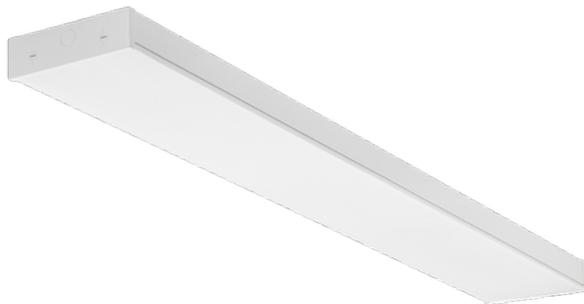

Uniplus is a surface mounted luminaire with the latest technology and optics to ensure a high luminous efficiency and low glare. -Low glare UGR<19 -Up to 150lm/W -Easy and fast installation. -Suspended installation (accessory)

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP40
Outdoor	No
Operating temperature (°C)	-20 - 40
Through-wiring (mm <sup>2</sup> )	5x2,5

**PRODUCT DATA SHEET**

Uniplus 6200lm 830 90° 40W 5x2,5mm2 1500mm WH DALI

Art.no: 103052-2-90-3-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	135
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (replaceable)
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.
Lifetime (h)	L80: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Shenzhen leadopto Technology Co.Ltd
Forward Current LED (min-max) (mA)	150 - 150

DRIVER	
Manufacturer (driver)	Lifud
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	162.6
Height (product) (mm)	49.5
Weight (product) (kg)	3.4

MATERIALS AND SURFACES	
Color	White
RAL Code	RAL9003
Housing Material	Steel

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial, Office, School, Shop
Mounting	Surface, Suspended, Ceiling
Connection (system)	QuickConnect



## PRODUCT DATA SHEET

Uniplus 6200lm 830 90° 40W 5x2,5mm2 1500mm WH DALI

Art.no: 103052-2-90-3-ddd



*Lighting Solutions*

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	B
CE mark	Yes
EPD number	NEPD-14088-14413

## LIGHT DISTRIBUTION

