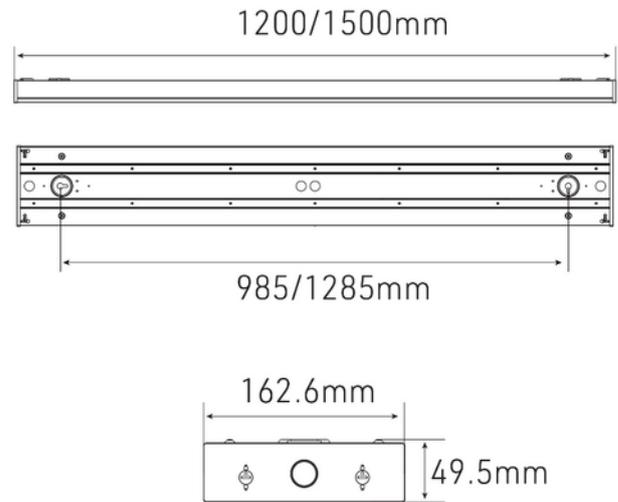


**PRODUCT DATA SHEET**

Uniplus 6200lm 830 90° 40/34/28/23W 5x2,5mm2 1500mm WH

Art.no: 103052-90-3

*Lighting Solutions*

Uniplus 6200lm 830 90° 40/34/28/23W 5x2,5mm2 1500mm WH



Uniplus is a surface mounted luminaire with the latest technology and optics to ensure a high luminous efficiency and low glare. -Low glare UGR<19 -Up to 150lm/w -Easy and fast installation. -Suspended installation (accessory) Efficiency can be adjusted by dip switch: 39W = 5670lm 34W = 5000lm (default setting) 28W = 4130lm 23W = 3470lm

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	None
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IK (system)	IK06
IP (system)	IP40
Outdoor	No
Operating temperature (°C)	-20 - 40

**PRODUCT DATA SHEET**

Uniplus 6200lm 830 90° 40/34/28/23W 5x2,5mm2 1500mm WH

Art.no: 103052-90-3

*Lighting Solutions*

TECHNICAL DATA	
Through-wiring (mm ²)	5x2,5

PHOTOMETRIC DATA	
Lumen Out (system) (lm)	5669
Efficacy (system) (lm/W)	140
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000
Color Code	830
Lightsource Type	LED (replaceable)
Socket / Cap-Base	N/A
Lens (Diffuser)	Micropris.
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
UGR (<=)	19
Manufacturer (light source)	Shenzhen leadopto Technology Co.Ltd
Forward Current LED (min-max) (mA)	0 - 150

DRIVER	
Flicker-free	Yes
Max load pr circuit - B10	20
Max load pr circuit - B16	32
Max load pr circuit - C10	34
Max load pr circuit - C16	54
Leakage current (mA)	0.7
Inrush current time (µs)	250.0
Inrush current I _{max} (A)	35.0

DIMENSIONS	
Length (product) (mm)	1500.0
Width (product) (mm)	162.6
Height (product) (mm)	49.5
Weight (product) (kg)	3.4

MATERIALS AND SURFACES	
Color	White

**PRODUCT DATA SHEET**

Uniplus 6200lm 830 90° 40/34/28/23W 5x2,5mm2 1500mm WH

Art.no: 103052-90-3

*Lighting Solutions*

MATERIALS AND SURFACES	
RAL Code	RAL9003
Housing Material	Steel

INSTALLATION AND CONNECTION	
Areas of use	Generally, Industrial, Office, School, Shop
Mounting	Surface, Suspended, Ceiling
Connection (system)	QuickConnect

ENERGY AND CERTIFICATIONS	
Energy Class EPREL	B
CE mark	Yes
EPD number	NEPD-14088-14413

LIGHT DISTRIBUTION