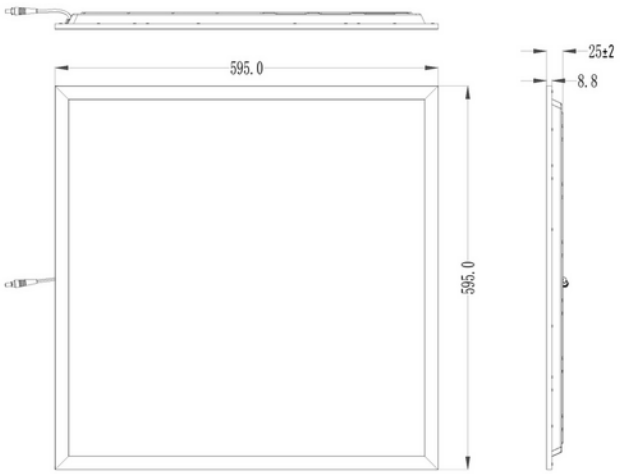

Panel BL 595x595 4650lm 930 28W Prism IP54 WH w/o driver

CE 230V 50Hz IP54 IK02

D A↑G

MAINTENANCE

Clean with a dry cloth

SPECIFICATIONS	
Maintenance	Clean with a dry cloth
Operating temperature (°C)	40
Forwrard Voltage LED (max tp=25) (V)	40.0
Forward Voltage LED (min tp=65) (V)	30.0
Length (product) (mm)	595.0
Width (product) (mm)	595.0
Heigth (product) (mm)	25.0
Weight (product) (kg)	1.6