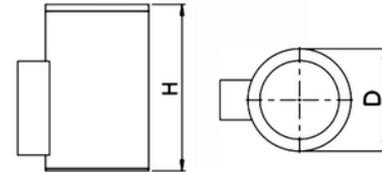


**FDV DOCUMENTATION**

Tube Wall Up&Down 2x2750lm 830 45° 39W IP65 Ø155x250mm D.GR
 Art.no: 1076-45-1

*Lighting Solutions*

D, mm	H, mm
155	464
	250

Tube Wall Up&Down 2x2750lm 830 45° 39W IP65 Ø155x250mm D.GR



SPECIFICATIONS	
Operating temperature (°C)	40
Forward Voltage LED (max tp=25) (V)	36.8
Forward Voltage LED (min tp=65) (V)	31.2
CC (driver) [mA]	1050
CC (forward voltage driver) (V)	48.0
Inrush current time (µs)	50.0
Inrush current I _{max} (A)	5.0
Width (product) (mm)	155.0
Height (product) (mm)	464.0
Weight (product) (kg)	3.2



FDV DOCUMENTATION

Tube Wall Up&Down 2x2750lm 830 45° 39W IP65 Ø155x250mm D.GR

Art.no: 1076-45-1



Lighting Solutions

LIGHT DISTRIBUTION

