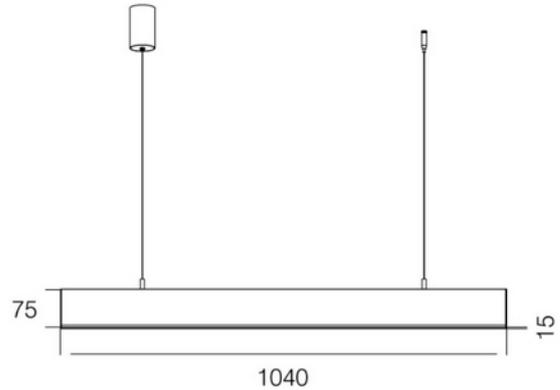


**PRODUCT DATA SHEET**

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK

Art.no: 1078-2

*Lighting Solutions*

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK

**A**

Office slim is an elegant and slim luminaire to use in all offices. Light distribution: 70% down & 30% up. Turn on/ off by hand movement. Complete with canle and 1500mm wire.

ELECTRICAL DATA	
Protection Class (system)	1
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	64
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK

Art.no: 1078-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	5
UGR (<=)	19
Manufacturer (light source)	Edison
Forward Voltage LED (max tp=25) (V)	3.6
Driftspenning LED (min tp=65) (V)	2.9

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1 or 2
Max Output Voltage (V)	60
IP (driver)	IP20
Expected Lifetime (driver) (h)	100000
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	800 - 1050
CC (forward voltage driver) (V)	30.0 - 40.0
Output Current Tolerance (%)	7.5
Current Ripple (%)	5.0
Max load pr circuit - B10	8
Max load pr circuit - B16	16
Max load pr circuit - C10	16
Max load pr circuit - C16	32
Leakage current (mA)	0.45
Inrush current time (µs)	250.0
Inrush current I _{max} (A)	25.0

DIMENSIONS	
Length (product) (mm)	1200.0
Width (product) (mm)	15.0
Height (product) (mm)	75.0
Weight (product) (kg)	2.7



PRODUCT DATA SHEET

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK
Art.no: 1078-2



Lighting Solutions

MATERIALS AND SURFACES

Color	Black
-------	-------

INSTALLATION AND CONNECTION

Connection (system)	Terminal
---------------------	----------

ENERGY AND CERTIFICATIONS

CE mark	Yes
Energy Efficiency Class	A