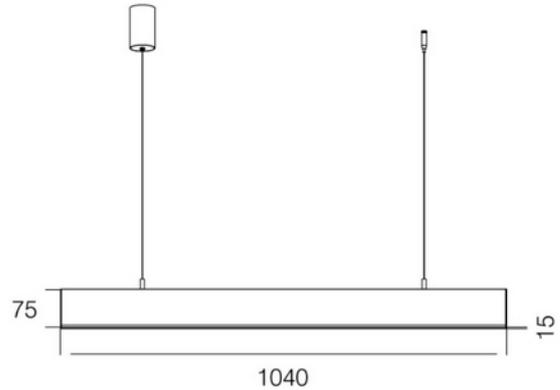


**PRODUCT DATA SHEET**

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK DALI

Art.no: 1078-2-ddd

*Lighting Solutions*

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK DALI



Office slim is an elegant and slim luminaire to use in all offices. Light distribution: 70% down & 30% up. Turn on/ off by hand movement. Complete with canle and 1500mm wire.

ELECTRICAL DATA	
Protection Class (system)	1
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	64
CRI / Ra (>=)	80
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK DALI

Art.no: 1078-2-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	830
Lightsource Type	LED (built in)
Lens (Diffuser)	Opal
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	5
UGR (<=)	19
Manufacturer (light source)	Edison
Forward Voltage LED (max tp=25) (V)	3.6
Driftspenning LED (min tp=65) (V)	2.9

DRIVER	
Manufacturer (driver)	Tridonic
Protection Class (driver)	1
Standby power P _{sb} (W) <	0.15
Flicker metric (P _{st} LM) <	1.0
Stroboscopic effect metric (SVM) <	0.4
Max Output Voltage (V)	60
Dimming (driver)	DALI2
Dimming Minimum Level (%)	1.0
Dimming output type	Amplitude Modulation
IP (driver)	IP20
Expected Lifetime (driver) (h)	100
Constant current or voltage (CC or CV)	CC
CC (driver) [mA]	350 - 1050
CC (forward voltage driver) (V)	20.0 - 50.0
Max load pr circuit - B10	13
Max load pr circuit - B16	21
Max load pr circuit - C10	21
Max load pr circuit - C16	35
Max load pr circuit - C20	45
Inrush current time (μs)	170.0
Inrush current I _{max} (A)	35.0

DIMENSIONS	
Length (product) (mm)	1200.0

**PRODUCT DATA SHEET**

Office Slim Up&Down 5200lm 70/30 830 95° 42W BK DALI

Art.no: 1078-2-ddd

*Lighting Solutions*

DIMENSIONS	
Width (product) (mm)	15.0
Height (product) (mm)	75.0

MATERIALS AND SURFACES	
Color	Black

INSTALLATION AND CONNECTION	
Connection (system)	Terminal

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A