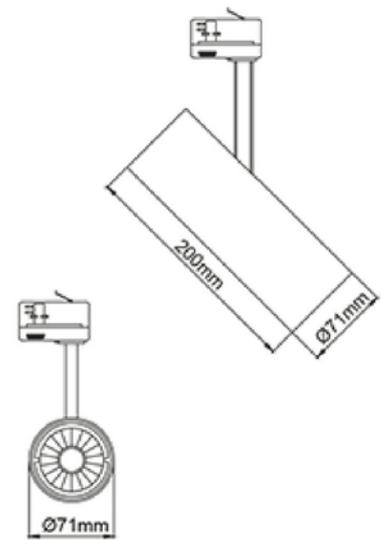
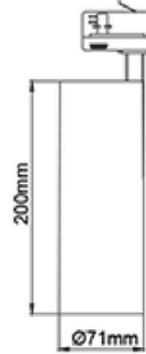


**PRODUCT DATA SHEET**

Silindir 70 2500lm 930 40° 20W WH 3-circuit DALI

Art.no: 1081-7-40-3-ddd

*Lighting Solutions*

Silindir 70 2500lm 930 40° 20W WH 3-circuit DALI



The Silindir uses the possibilities created by new technology. The LED driver is mounted inside the luminaire body. This gives us a slim design combined with a powerful light output that can be easily adjusted in all directions to meet all needs. Cylinder can be tilted 90 degrees and rotated 350 degrees its own axis.

ELECTRICAL DATA	
Protection Class (system)	1
Dimming (system)	DALI2
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
Efficacy (system) (lm/W)	120

**PRODUCT DATA SHEET**

Silindir 70 2500lm 930 40° 20W WH 3-circuit DALI

Art.no: 1081-7-40-3-ddd

*Lighting Solutions*

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000
Color Code	930
Lightsource Type	LED (built in)
Lens (Diffuser)	Clear
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	3
Manufacturer (light source)	Tridonic
Forward Current LED (min-max) (mA)	null - 1540
Forward Voltage LED (max tp=25) (V)	38.7
Driftspenning LED (min tp=65) (V)	29.3

DRIVER	
Manufacturer (driver)	Osram

DIMENSIONS	
Length (product) (mm)	71.0
Width (product) (mm)	71.0
Height (product) (mm)	215.0
Weight (product) (kg)	1.0

MATERIALS AND SURFACES	
Color	White

INSTALLATION AND CONNECTION	
Areas of use	Shop, Showroom
Mounting	Track, Ceiling
Connection (system)	Track 3-Circuit+dim

ENERGY AND CERTIFICATIONS	
CE mark	Yes
Energy Efficiency Class	A+



PRODUCT DATA SHEET

Silindir 70 2500lm 930 40° 20W WH 3-circuit DALI

Art.no: 1081-7-40-3-ddd



Lighting Solutions

LIGHT DISTRIBUTION

