


**PRODUCT DATA SHEET**Cold 5 1150lm 930 30° 5x2W BK w/o driver
Art.no: 1107-30-2*Lighting Solutions*

130x36mm



Cold 5 1150lm 930 30° 5x2W BK w/o driver

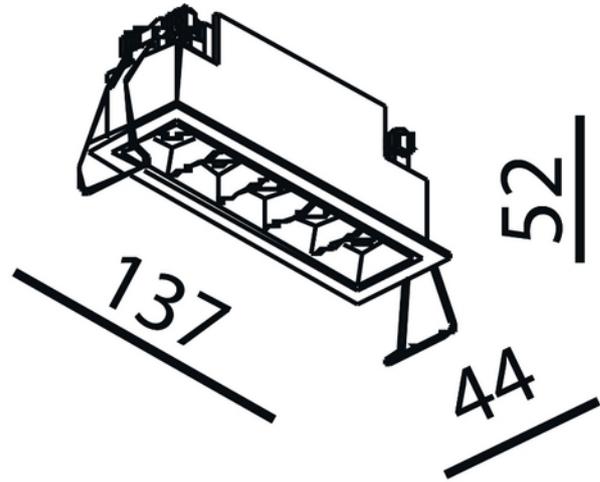

Cold black are delivered with black front ring. See accessories for optional front rings that can be bought separately, and correct choice of driver

ELECTRICAL DATA	
Protection Class (system)	3
Dimming (system)	Depending on Driver
Voltage (system) [V]	230V 50Hz

TECHNICAL DATA	
IP (system)	IP20
Outdoor	No

PHOTOMETRIC DATA	
CRI / Ra (>=)	90
CCT (Color Temperature) (K)	3000

**PRODUCT DATA SHEET**

Cold 5 1150lm 930 30° 5x2W BK w/o driver

Art.no: 1107-30-2

*Lighting Solutions*

PHOTOMETRIC DATA	
Color Code	930
Lightsource Type	LED (built in)
Socket / Cap-Base	N/A
Lens (Diffuser)	None
Lifetime (h)	L80B10: 100 000
MacAdam (SDCM)	2
UGR (<=)	13
Manufacturer (light source)	Osram
Forward Current LED (min-max) (mA)	200 - 1800
Forward Voltage LED (max tp=25) (V)	15.0

DRIVER	
Manufacturer (driver)	No driver
Flicker-free	Yes

DIMENSIONS	
Length (product) (mm)	137.0
Width (product) (mm)	44.0
Height (product) (mm)	52.0
Weight (product) (kg)	0.32

MATERIALS AND SURFACES	
Color	Black
Housing Material	Aluminium
Housing Material %	89.0
Material 2%	1.7999999999999998
Material 3%	0.5
Material 4%	0.8999999999999999
Material 5%	1.3
Material 6%	1.9
Material 7%	4.6

INSTALLATION AND CONNECTION	
Areas of use	Bathroom, Cafe, Cottage, Generally, Hotel, Residence, Shop



PRODUCT DATA SHEET

Cold 5 1150lm 930 30° 5x2W BK w/o driver

Art.no: 1107-30-2



Lighting Solutions

INSTALLATION AND CONNECTION	
Mounting	Recessed, Ceiling
Connection (system)	Depending on driver

ENERGY AND CERTIFICATIONS	
CE mark	Yes
EPD number	NEPD-14537-15050